

SoCalGas-147

Agenda for D.O.G Annual Review Meeting for Aliso Canyon (June 13, 1989).

I.19-06-016

ALJs: Hecht/Poirier

Date Served: March 17, 2021

*file
ACO205*

AGENDA FOR D.O.G. ANNUAL REVIEW
MEETING FOR ALISO CANYON
JUNE 13, 1989

ATTENDING

D. J. Anderson
S. P. Robinson
M. E. Melton
R. D. Phillips
P. J. Kinnear, Division of Oil and Gas

The topics to be covered in the meeting include geology, project performance, conservation, pollution prevention and operations.

DJA:hr
6/9/89

177443

Aliso_Canyon_DOGGR_0004940
AC_CPUC_SED_DR_27_0002984

SoCalGas-147.0001

SOUTHERN CALIFORNIA GAS COMPANY
ALISO CANYON FIELD
ANNUAL REVIEW MEETING
with the
DIVISION OF OIL AND GAS

TABLE OF CONTENTS

Geology

- Interpretation
- Studies in progress

Project Performance

- Report on injection pressures and reservoir pressures
- Volume of gas in storage vs. pressure/z (Hysteresis Curve)
- Reservoir data changes or additions
- Reservoir fluid distribution
- Annual rate of oil produced vs. cumulative oil (former oil reservoirs)
- Cumulative gas vs cumulative oil production
- Changes in the composition of gas injected
- Unusual or unpredictable occurrences

Conservation (Waste or loss of natural resources)

- Report on monitoring programs
- Losses detected and corrective measures taken
- Changes or additions to monitoring programs

Pollution Prevention

- Report on well shut-in system (a) status of installation, (b) testing results on critical wells, (c) alterations to system
- Water disposal methods
- Spill prevention and containment

Operations

- Wells drilled, abandoned, converted, or reworked
- Unusual occurrences or problems

GEOLOGY

A 1978 geologic study of the Aliso Canyon field performed by the consulting firm Scientific Software Corporation indicated that gas had not migrated out of the defined boundaries (Frew fault on the west, Ward fault on the north and fluid contacts on south and east). The structure maps were revised in 1988 to incorporate 13 new wells that have been drilled over the past 10 years and to include new interpretations on faults along the northern boundary of the field. Isobaric maps drawn during recent shut-in periods indicate partial permeability barriers in the field with wells on the north west side (IW 70, F-2 and F-3), as well as IW 69 behaving differently than the rest of the field. It has been substantiated by Dr. Katz that gas is migrating to tighter zones in that area which has caused the shift in the P/Z curve. This low permeability area has been verified by pressure buildup tests.

Updated versions of structure maps and field cross-sections were used to determine vertical displacement along the Ward, Frew, and sub-Frew faults. All of these faults are reverse faults which bound the north and west flanks of the storage reservoir. Structure maps indicate the vertical displacement along the Ward fault is 300'-400' in the northwest section of the field. In the northeast section of the field, vertical displacement along the Ward fault is 1000'-1400'. North/south trending cross-sections through the west flank of the reservoir show the vertical displacements along the Frew and sub-Frew faults. The vertical displacement along the Frew fault ranges from 6000'-6500'. The vertical displacement along the sub-Frew fault is estimated at 300'-400'.

The conclusions of the 1978 Geological Study showed:

1. Reservoir Boundaries

South and East Sides:	Water aquifer
West Side:	Frew Fault
North Side:	Ward/Roosa Fault

2. SS-1-0 is an observation well which tests the communication between the storage zone and the Ward fault block. No gas shows were found in the Ward Fault block and subsequent pressure monitoring of the sub-Roosa fault block shows no communication with the storage zone.
3. The geologic structure is sound and competent to hold storage gas within the reservoir boundaries.
4. The northwest area represents 30% of initial gas cap volume, and 12% of the total reservoir pore volume.
5. The shifts to the right and left on the Hysteresis Curve has been due to:
 - a. Gas moving into and out of tighter areas of the reservoir and then returning to the more permeable areas.

- b. Some fault blocks, with restricted communication, being repressurized and depressurized.
 - c. Gas going into and out of the oil band.
6. Reasons for tilted water/oil contact along the south flank:
- a. Sand-shale facies change, possible pinchout on the south and east flanks.
 - b. Step segments offset by older faults.

In 1987, while abandoning Porter 4, the MP shale was tested for possible migrated gas from well leaks. The interval produced no gas.

The following table summarizes some of the historical and geologic data for the gas storage reservoir.

TABLE 1. Aliso Canyon Statistical Data

Historical Information

Year storage field was activated	1973
Discovery pressure	3602 psig

Reservoir Characteristics

Name and geologic age of formation	Sesnon - Miocene Frew - Eocene
Formation structure	Faulted anticline
Formation thickness	150' to 400'
Depth range for wells (MD)	7100' to 9400'
Average Bottomhole pressure at 70 Bcf	3600 psig
Average Bottomhole temperature	180°F
Cushion gas	91 Bcf
Working gas	70 Bcf

Operations

Gas Storage Wells	99
Observation Wells	11

DJA:hr
6/12/89

PROJECT PERFORMANCE

Injection Pressures

Figures 1, 2, and 3 show the variation of the average reservoir pressure with inventory for the 1986-1988 injection cycles. The stabilized reservoir pressure is always maintained at less than discovery pressure (3602 psig.)

Assuming a 0.7 psi/ft. fracture gradient for an 8000 ft. well, the wellbore pressure required to fracture the formation will be 5600 psig, which is 2000 psig greater than we ever encounter at Aliso Canyon.

Hysteresis Curve

Figure 4 is an updated graph of P/Z versus inventory (the data is also listed in Table 2). The shift in reservoir pressures from 1974 to date when plotted versus injected gas content is a combination of the repressurization of low pressure gas cap areas in the various fault blocks and of gas going into solution in crude oil some distance from the wellbore.

During the past four years the reservoir has not been filled to capacity. As a result the hysteresis curve has shifted to the left. This could be a result of gas coming out of solution, gas coming from tight regions of the reservoir, or gas returning from another fault block, such as the Ward fault or sub-Frew block on the north and west flanks. However, we have seen no evidence of pressure changes in observation wells penetrating the Ward fault block. We have no observation wells in the sub-Frew block. The volumetric weighting of reservoir blocks has been updated based upon observed pressure response in these blocks (see Figure 5). This revised reservoir weighting is used to calculate the current hysteresis curve, Figure 4.

Fluid Distributions

Figures 6 and 7 show structure maps for the S-4 and S-8 zone tops, respectively. Also shown are the original and best interpretation of current gas/oil and oil/water contacts. There is essentially no oil belt on the east flank which results in a gas/water contact along that flank. Very little changes in fluid contacts have been observed.

Reservoir Data Changes or Additions

No new wells have been drilled since the last DOG review. Most reservoir parameters are fairly well fixed from our major geologic study and log analysis. Subtle changes in gas saturation may have caused significant changes in the effective gas permeability and individual well deliverabilities. Each well is tested two to three times per year to determine its optimum sand free deliverability.

Oil Production

Table 3 presents annual oil production figures, starting from 1970 to date. From discovery the cumulative oil production through 1988 was 25,594,350 barrels. Figure 8 shows the annual oil production versus cumulative oil production.

Figure 9 is a graph of cumulative gas production versus cumulative oil production.

The performance of the reservoir since 1970 is shown on Figure 10. The plots of annual pressures decline through 1972. The semiannual plot from the start of storage operations illustrates the high and low range of inventory pressures. The estimated reserves for Aliso Canyon as of 12/31/88 is 884,000 Bbls. A 10% annual decline rate is used for Aliso Canyon oil production estimates.


Gas Analysis

Source gas for Aliso Canyon storage is still predominantly from the Permian Basin Mid-Continent area. As received, both the hydrocarbon distribution and helium content of this gas distinguish it from California gas. Table 4 represents a typical storage gas analysis.


Unusual Occurrences

There have been no unusual occurrences since the May 1988 DOG review.


DJA:hr
6/12/89

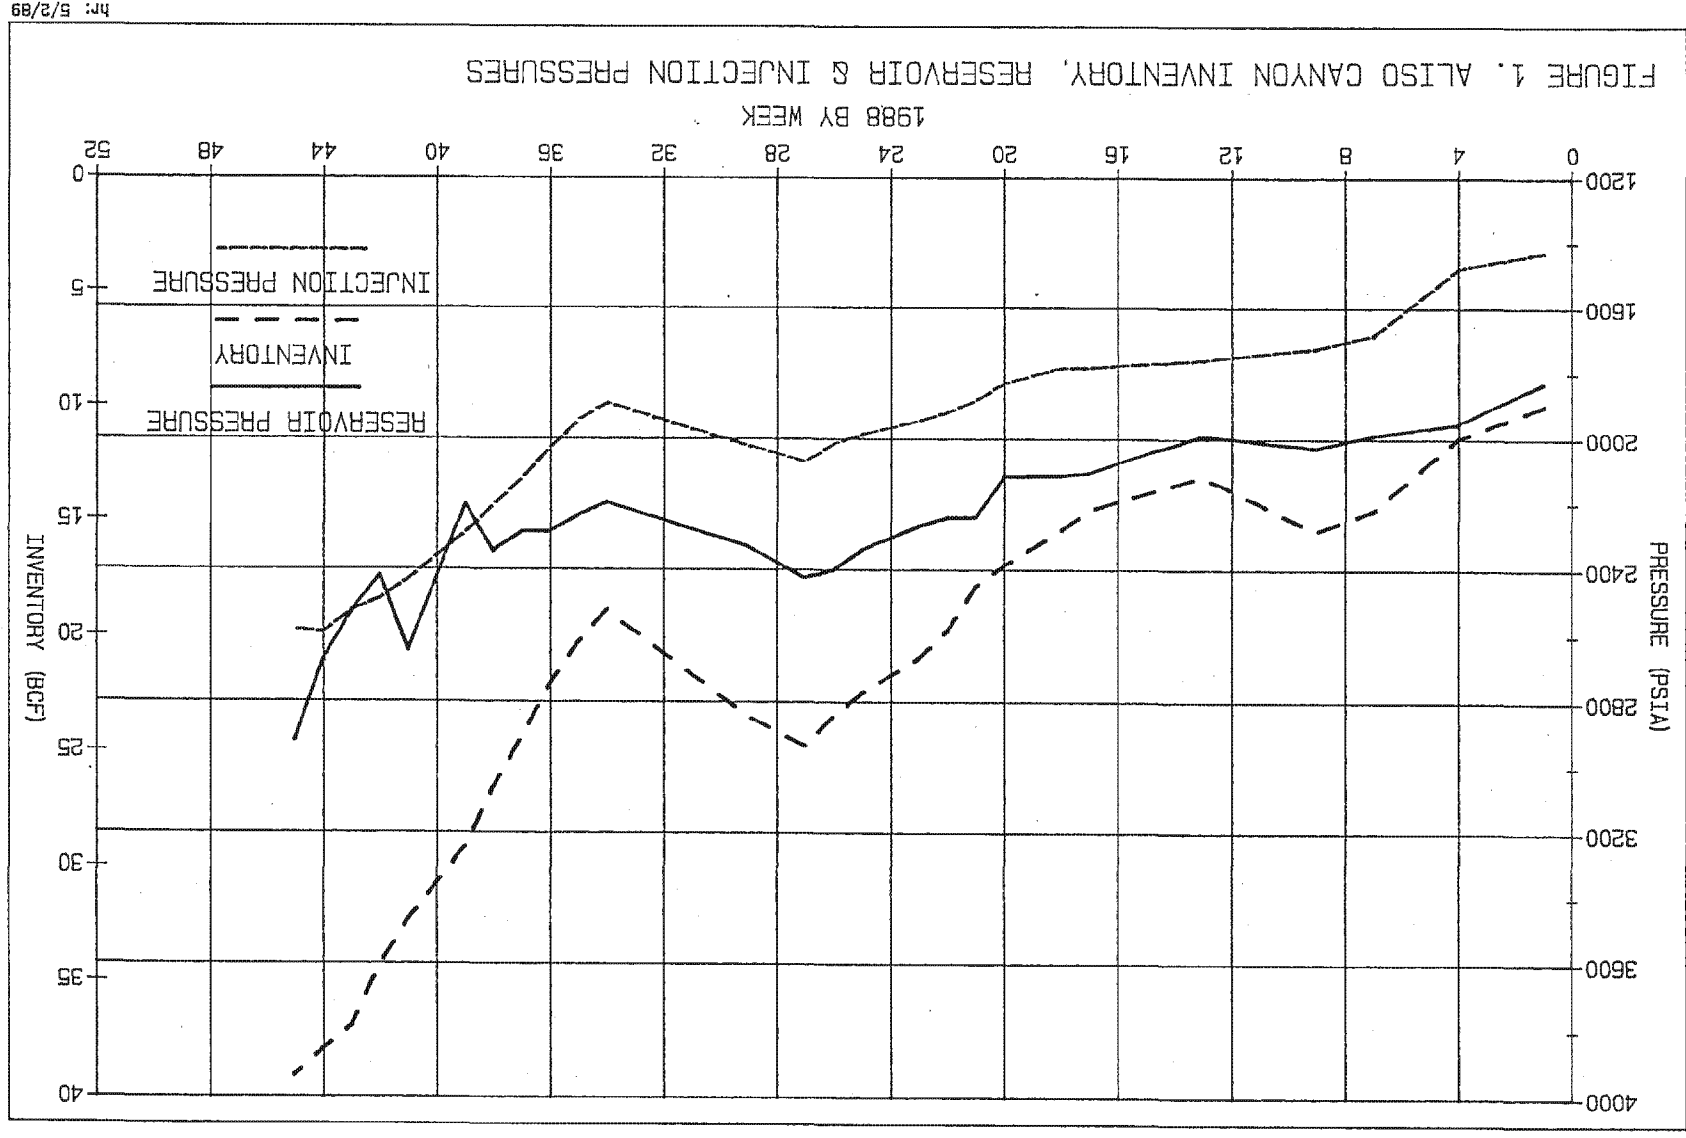

hr: 5/2/89

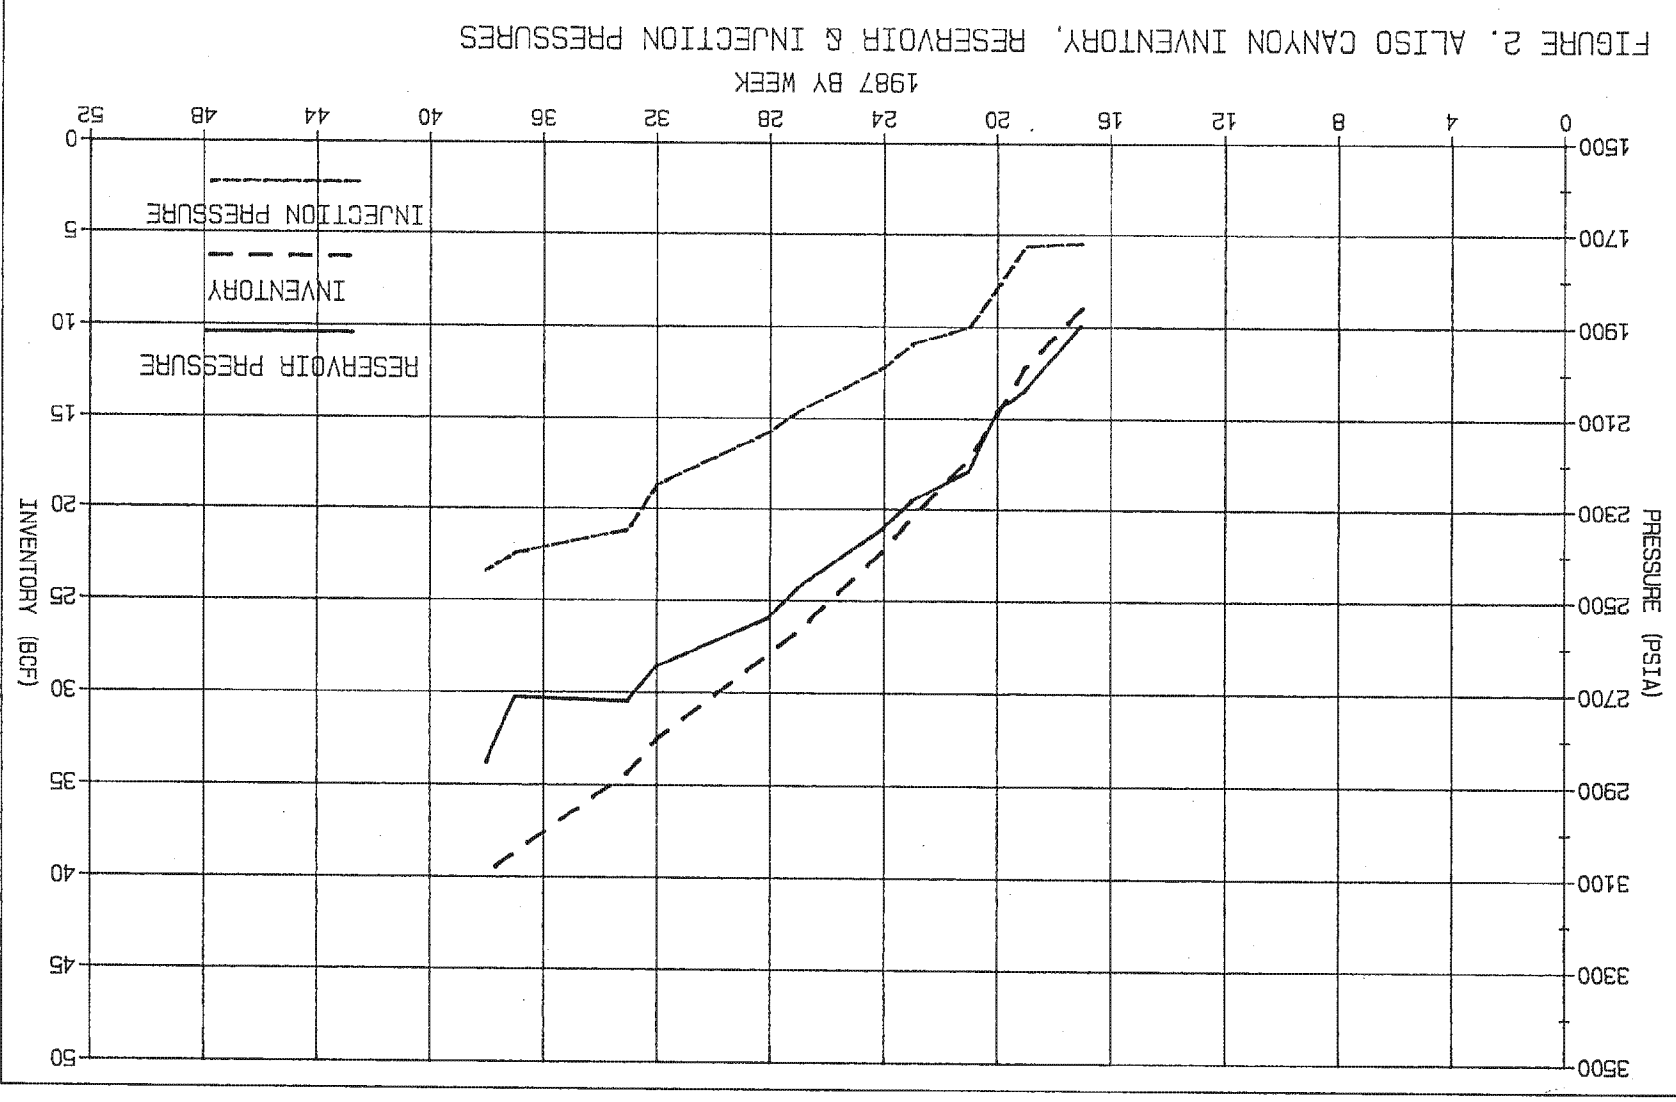

hr: 5/2/89

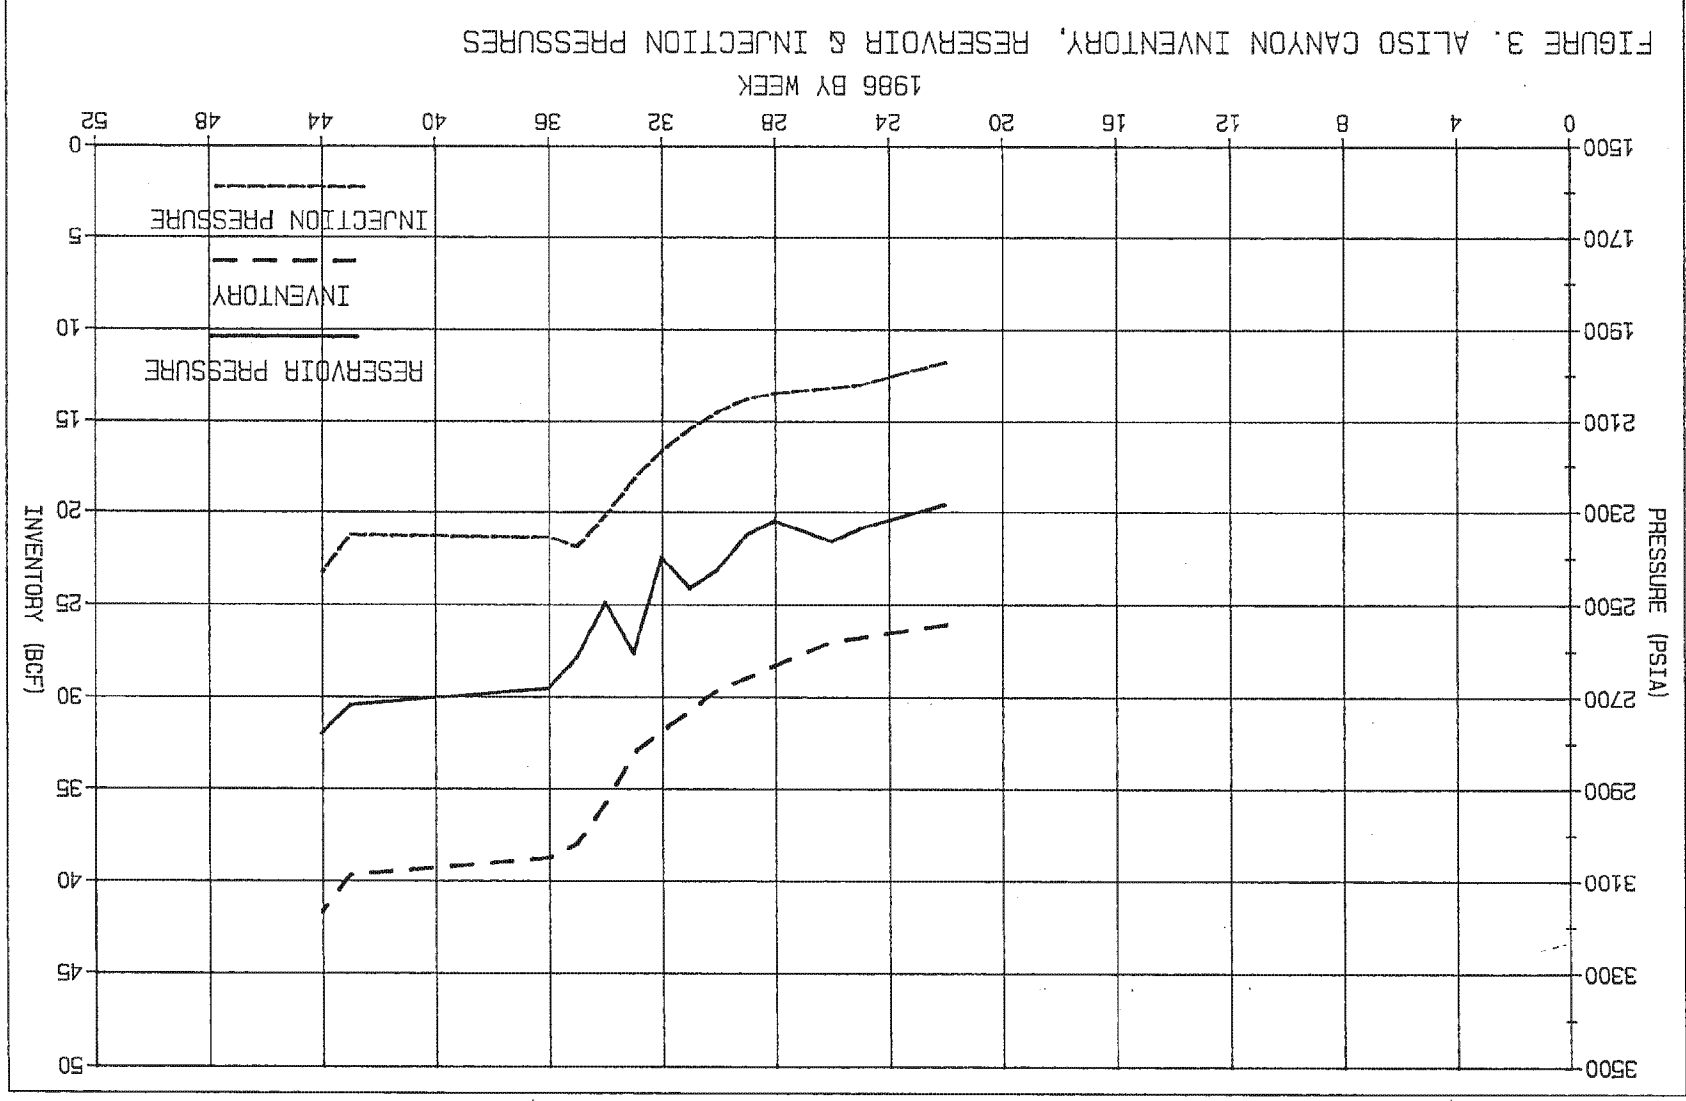

1 hr 6/6/89

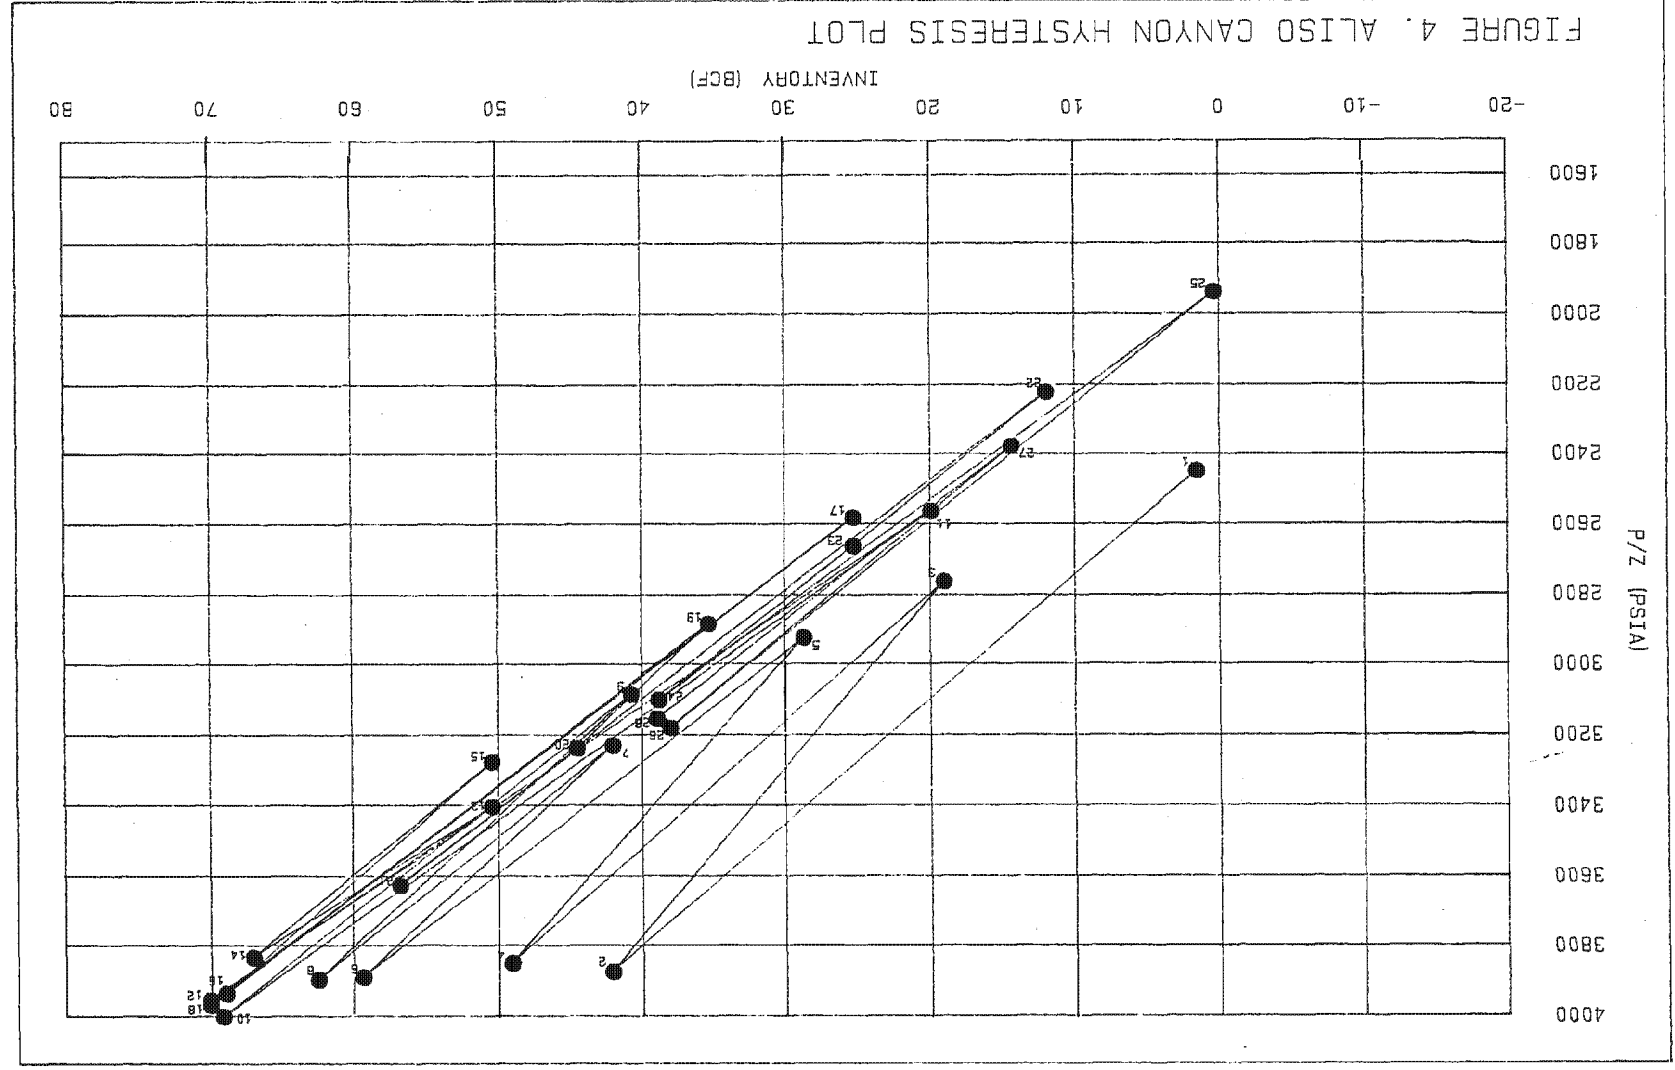


TABLE 2
ALISO CANYON

POINT	DATE	AVERAGE RESERVOIR PRESSURE (PSIA)	P/Z (PSIA)	INVENTORY (BCF)
1	1/10/74	2127	2445	1.5
2	10/19/74	3404	3872	42.1
3	4/22/75	2391	2762	19.0
4	9/19/75	3380	3848	49.1
5	1/22/76	2526	2921	28.7
6	11/24/76	3420	3888	59.4
7	2/7/77	2793	3227	42.0
8	9/15/77	3427	3895	62.5
9	3/12/78	2665	3082	40.7
10	11/30/78	3536	4000	69.1
11	4/13/79	2222	2560	19.9
12	11/28/79	3486	3952	70.0
13	3/31/80	2949	3400	50.4
14	11/3/80	3364	3832	67.0
15	4/1/81	2835	3274	50.4
16	12/2/81	3468	3934	68.9
17	4/19/82	2238	2579	25.3
18	9/24/82	3502	3967	70.0
19	3/17/83	2492	2881	35.3
20	11/28/83	2801	3236	44.5
21	11/19/84	3160	3625	56.8
22	4/18/85	1942	2219	11.9
23	4/30/86	2306	2661	25.3
24	10/15/86	2680	3099	38.8
25	3/18/87	1710	1935	0.3
26	11/23/87	2749	3178	38.0
27	4/22/88	2070	2375	14.3
28	12/13/88	2727	3153	38.9

2/28/89
:hr

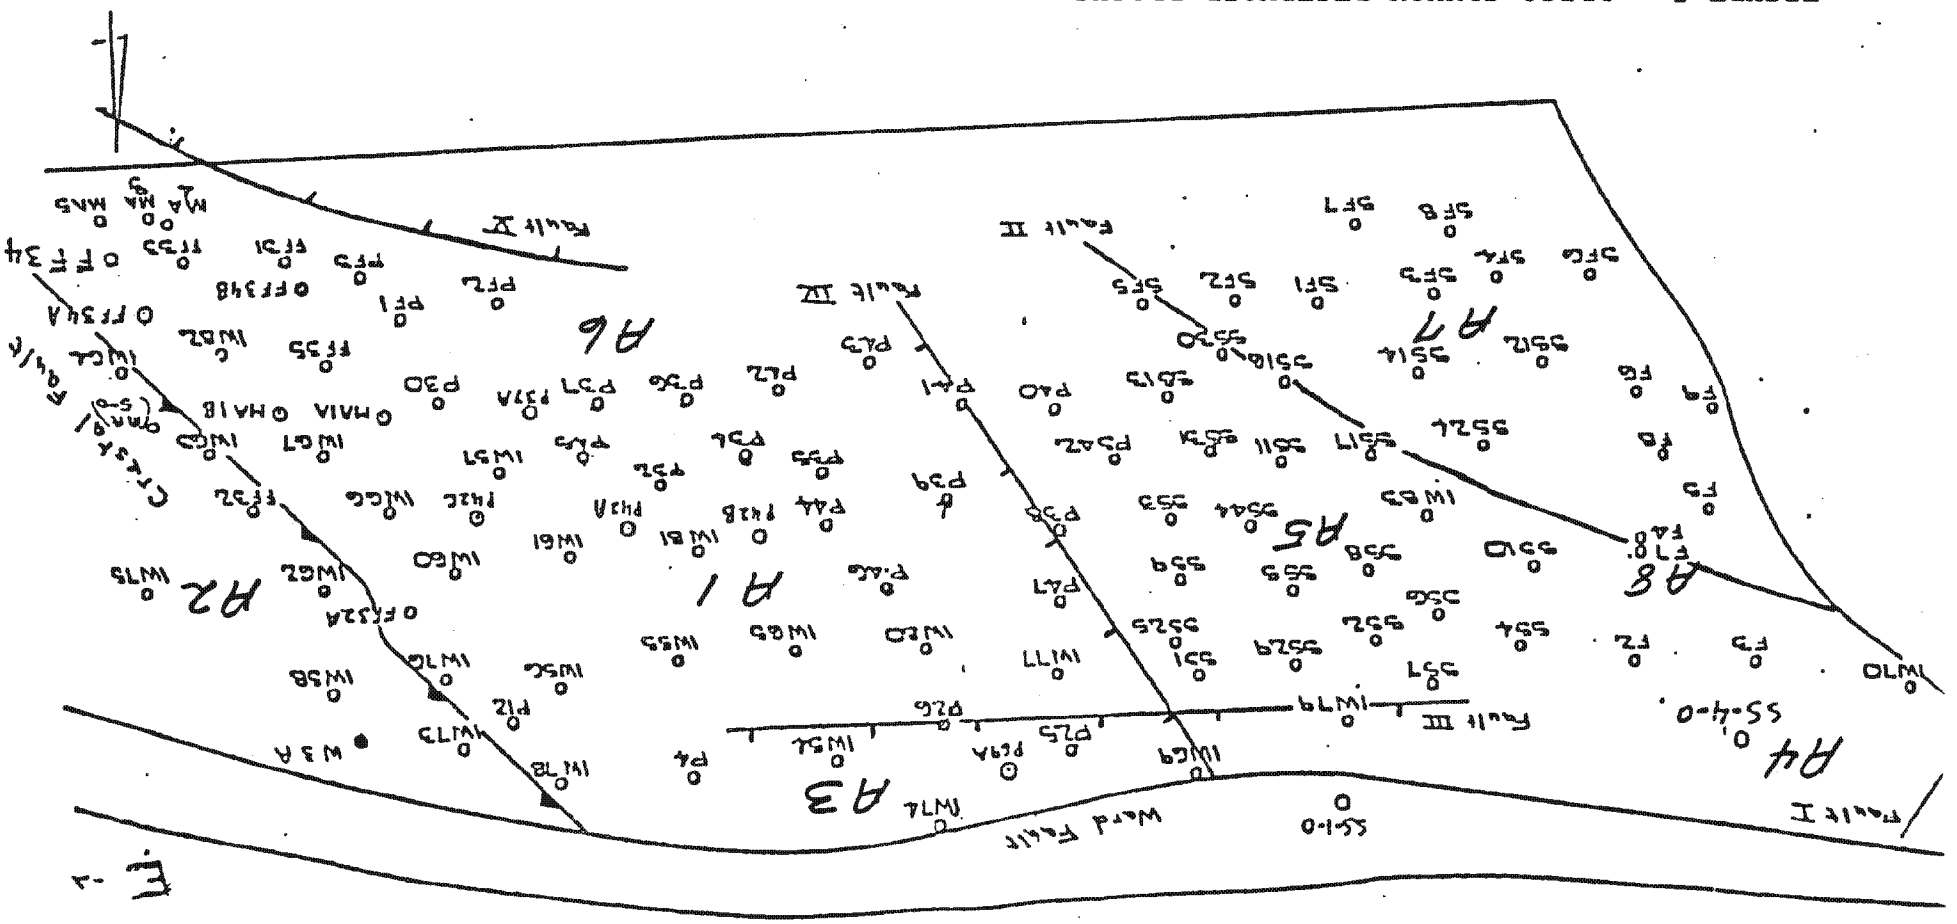


FIGURE 5. ALISO CANYON RESERVOIR BLOCKS


○ INE/MD WELLS
 ○ MD WELLS
 ○ OIL WELLS
 ○ OBSERVATION

ALISO CANYON
 BOTTOM HOLE LOCATIONS

TABLE 3
ALISO CANYON OIL PRODUCTION


<u>YEAR</u>	<u>OIL</u> (Bbls/Yr)	<u>CUMULATIVE OIL</u> (Bbls)
1970	529,023	21,600,000
1971	496,016	22,096,016
1972	368,978	22,464,994
1973	203,709	22,668,703
1974	228,813	22,897,516
1975	298,639	23,196,155
1976	233,997	23,430,152
1977	288,107	23,718,259
1978	293,964	24,012,223
1979	164,505	24,176,728
1980	143,595	24,679,262
1981	175,414	24,495,737
1982	183,525	24,679,262
1983	91,502	24,770,764
1984	119,302	24,890,066
1985	171,307	25,061,373
1986	202,317	25,263,690
1987	178,828	25,442,518
1988	151,832	25,594,350

:hr
6/6/89

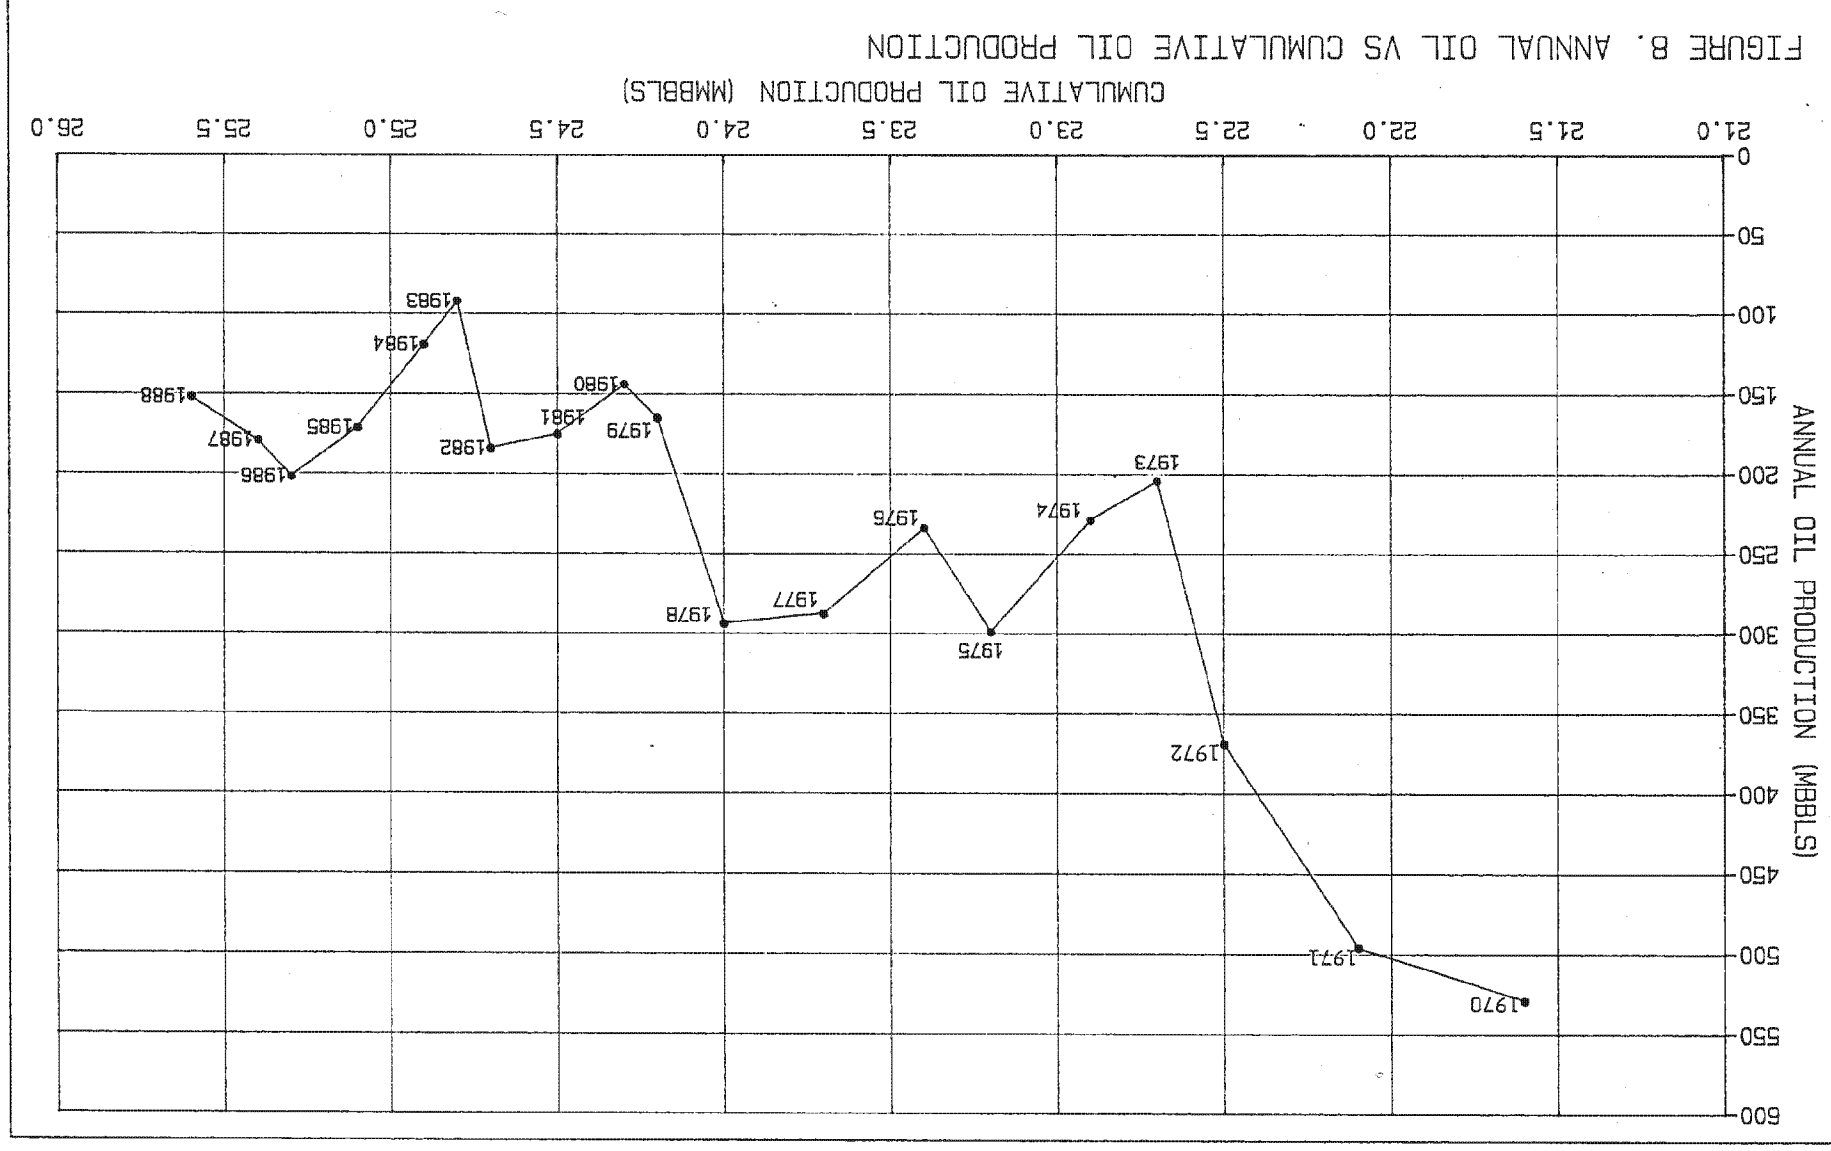

hr 8/9/88

hr 6/10/89

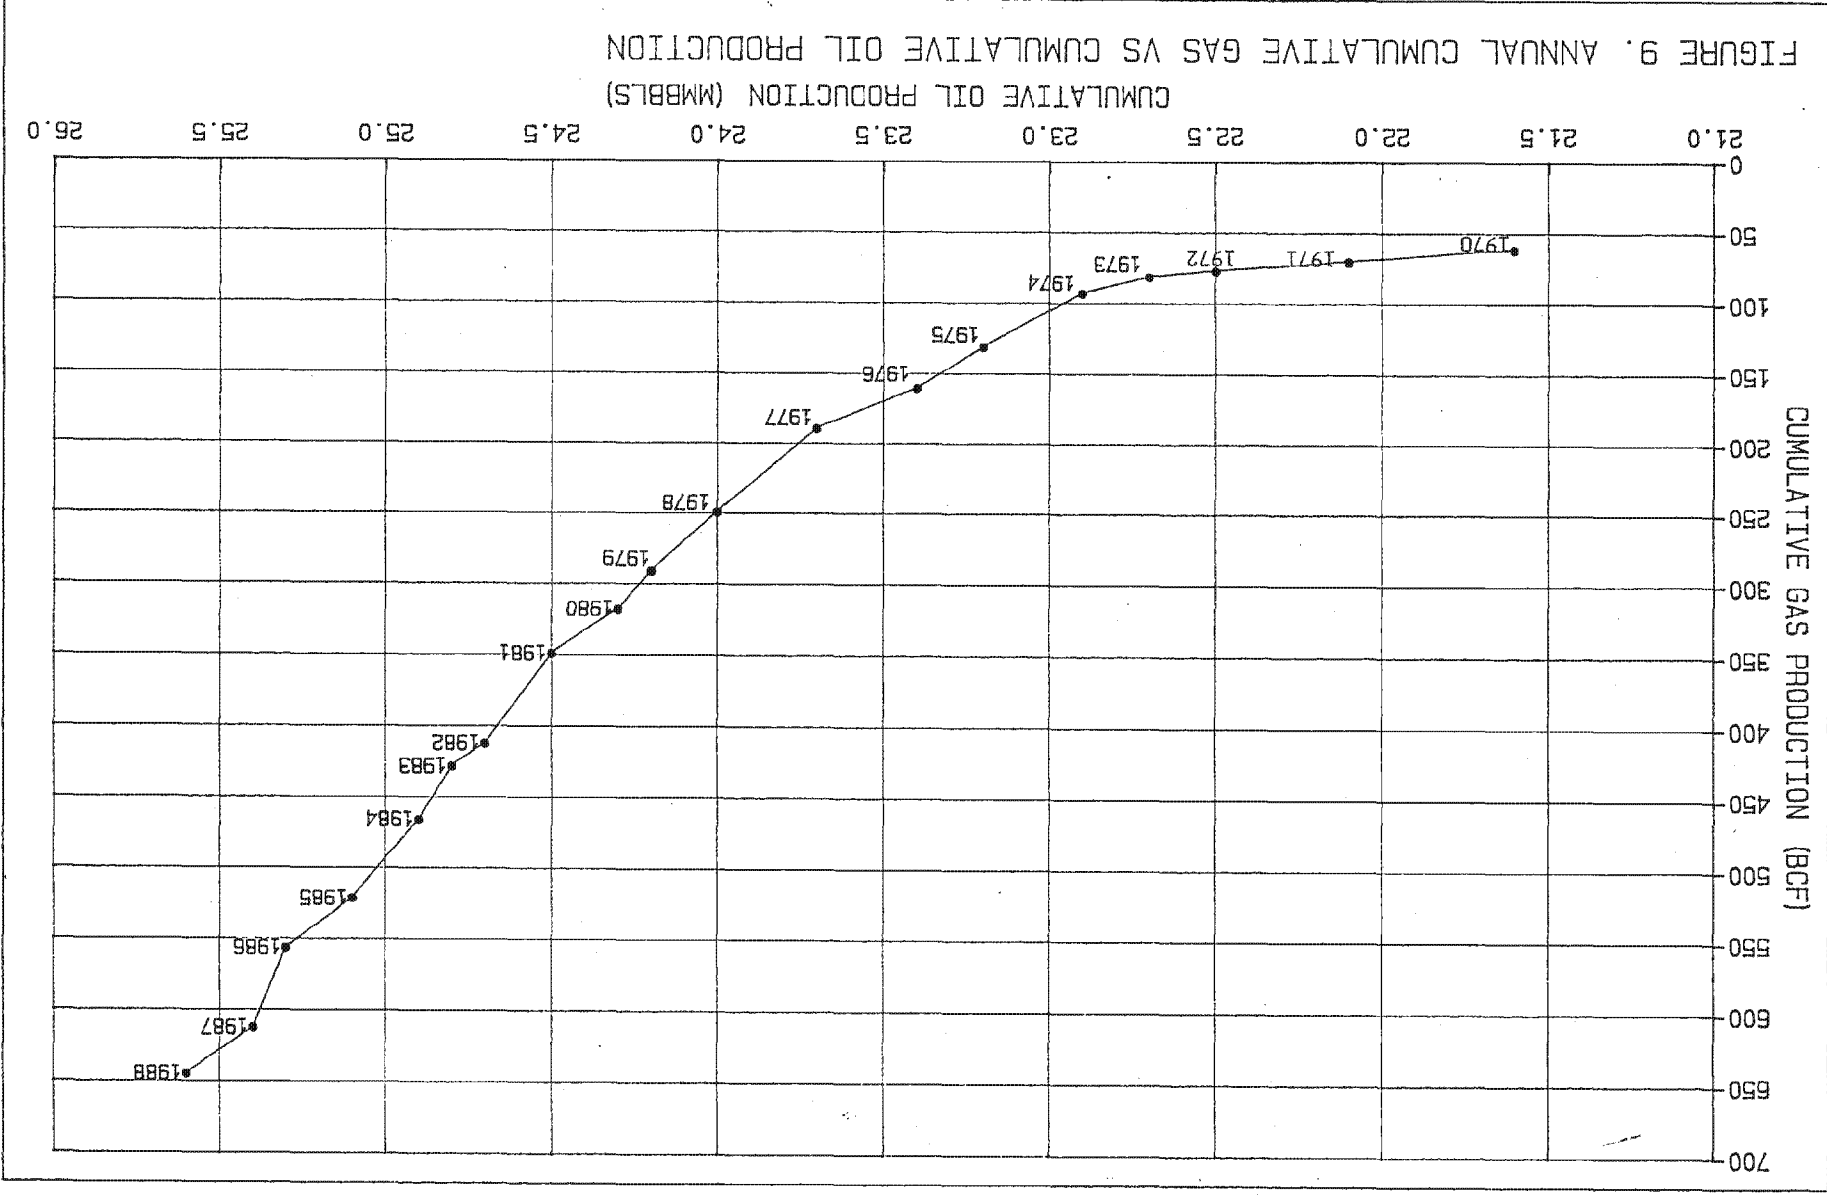

: hr 6/12/89

FIGURE 10. ALISO CANYON FIELD PRODUCTION

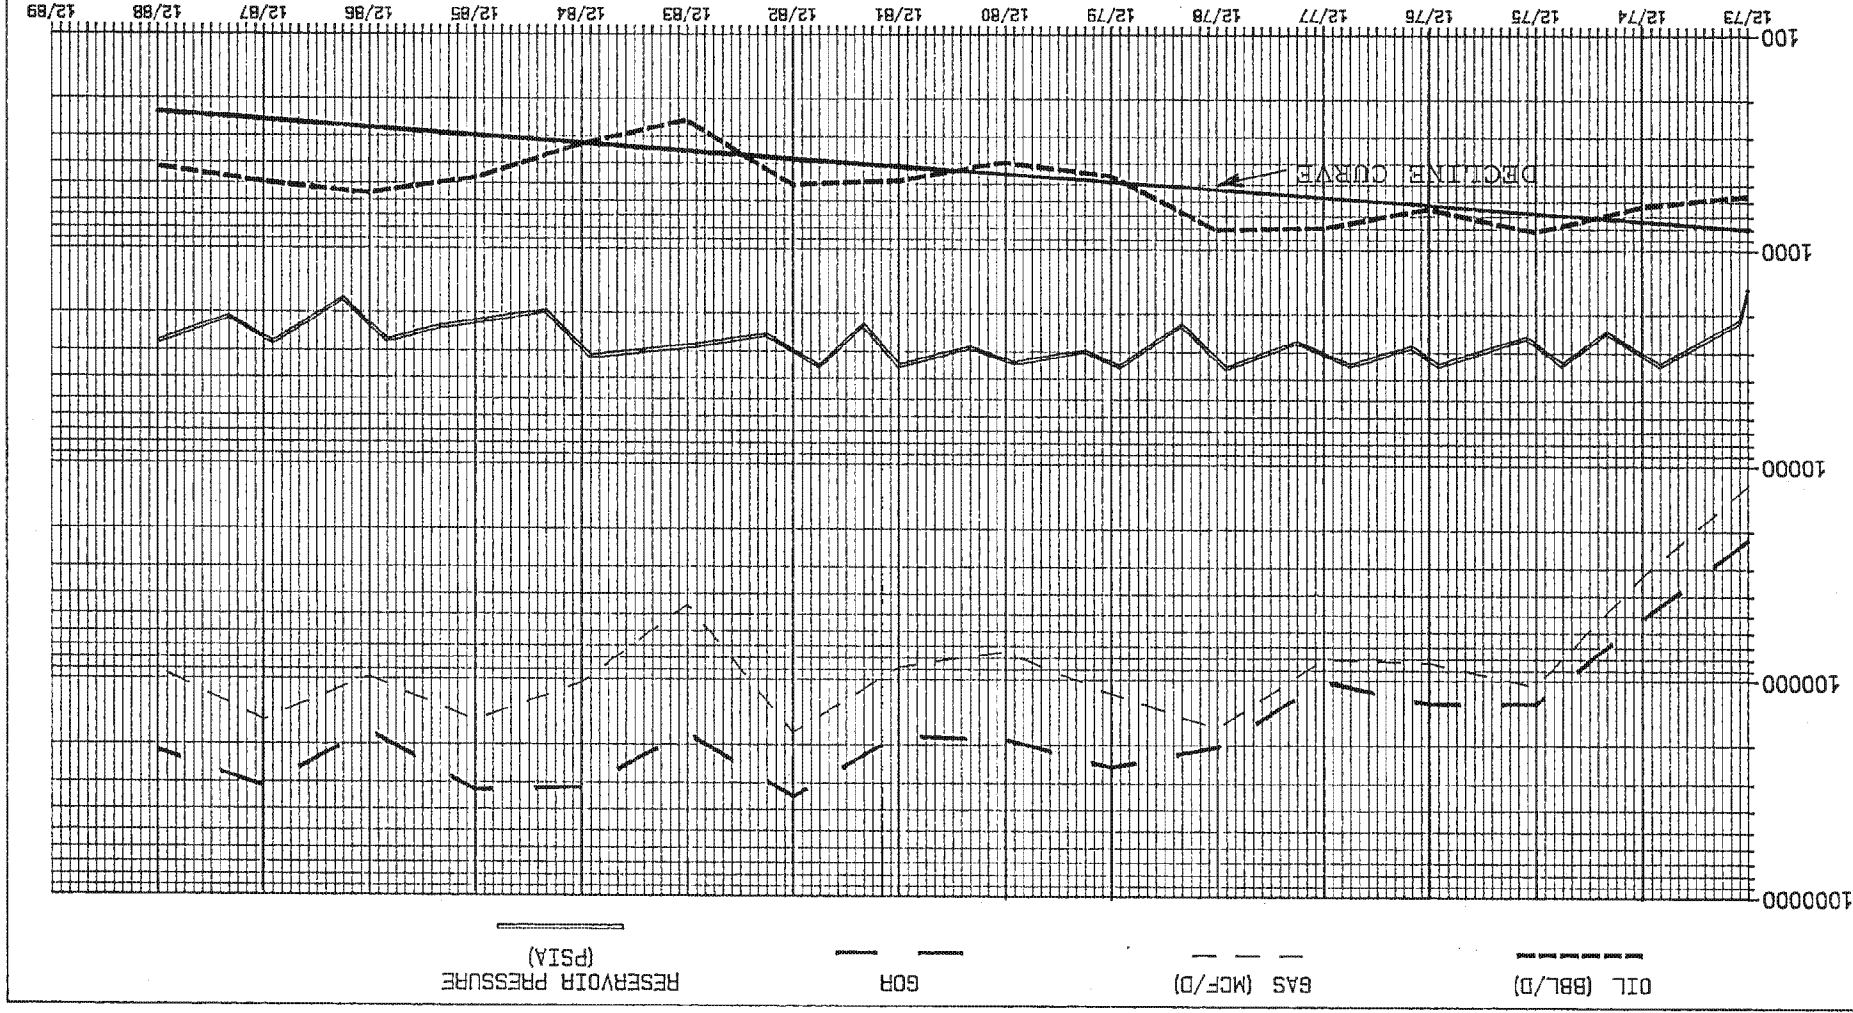


TABLE 4

GAS ANALYSIS

Typical Injection Gas for Aliso Canyon*

<u>Component</u>	<u>Volume Percent</u>
Nitrogen	1.16
CO2	1.12
Methane	92.65
Ethane	4.14
Propane	.71
I-Butane	.06
N-Butane	.08
I-Pentane	.02
N-Pentane	.02
C6 Plus	.04

* Sampled from Transmission system at Meter No. 3000-10 at Quigley, June 8, 1989.

Gas gravity	0.6020
-------------	--------

CONSERVATION

Monitoring Programs

A monitoring program is developed as a means of ensuring the integrity of the gas storage operation of the reservoir. The variety of the programs include integrity logs on all storage zone and observation wells, pressure monitoring of selected observation wells around and above the storage zone, gas analysis monitoring of abandoned wells located in and around the storage project and the monitoring of production of nearby fields (Figures 14-21). As a whole, the monitoring programs provides a focused means of assuring a safe and efficient operation.

Table 5 lists the normal monitoring activities at this field. The well problems listed in Table 6 were discovered, analyzed, and remedied using routine operating procedures. Examples of field data that are effective monitoring tools are as follows:

Table 7	A five week summary of annular pressures.
Table 8	Barhole reading for wellsite surface emission.
Table 9	Field helium counts.
Figure 11a-d	Plots of surface pressure for observation wells a. Del Aliso 1 b. Porter 14 c. Standard Sesnon 1-0 d. Ward 3
Figure 12	A plot of annular pressure for a given well.
Figure 13	Example of a temperature survey of storage well through a water injector zone.
Figure 14	Noise log showing noise around bottomhole hardware.
Figure 15	Aliso Canyon Main Area Production Data a. Aliso b. Aliso West c. Porter-Del Aliso A36 d. West Porter e. Faulted Sesnon
Figure 16	Aliso Canyon Gas Production Data (Main Area)
Figure 17	Del Valle (Main Area) Production Data
Figure 18	Newhall Production Data
Figure 19	Newhall-Potrero Production Data
Figure 20	Oat Mountain Production Data
Figure 21	Placerita Production Data

TABLE 5
SUMMARY OF THE ALISO CANYON MONITORING PLAN

STORAGE ZONE WELLS

ITEM	MINIMUM FREQUENCY OF DATA COLLECTION	PRIMARY RESPONSIBILITY	COMMENTS
1. Flow tests	Annual	Resident Reservoir Engineer	All wells are flow tested for sand, production and back-pressure curves annually.
2. Wellhead pressures (including surface casing and annular pressures)	Weekly	Station	Copies to Staff.
3. Plot of surface casing annular pressures	Weekly	Resident Reservoir Engineer	To be reviewed twice yearly with Underground Storage Staff.
4. Wellhead inspections	Monthly	Station	To be reported to Underground Storage Staff on daily activity report whenever leakage is found.
5. Temperature surveys	Annual	Resident Reservoir Engineer	Copies to Staff.
6. Noise logs	As needed	Resident Reservoir Engineer	Copies maintained in Division and Underground Storage files.
7. Tracer surveys	As needed	Resident Reservoir Engineer	A detailed explanation of methods and results to be prepared by Resident for each well. Copy sent to Underground Storage Staff.
8. Neutron logs	As needed	Underground Storage Staff	Copy to Division.
9. Reservoir shut-ins	Annual	Senior Petroleum Engineer	Hysteresis curve and Isobaric maps to be updated by Underground Storage Staff.
10. Annular blowdown	As needed	Resident Reservoir Engineer	To recommend and implement annular blowdown tests and programs to determine corrective action needed, and to prevent fracture of primary cement at surface string shoe.
11. Annular helium samples	Annual	Engineering Test Center	To monitor gas content in the annular.

Table 5, Page 2

SUMMARY OF THE ALISO CANYON MONITORING PLAN

NON-STORAGE ZONE WELLS

ITEM	MINIMUM FREQUENCY OF DATA COLLECTION	PRIMARY RESPONSIBILITY	COMMENTS
1. Wellhead pressures (including surface casing annular pressures)	Weekly	Station	Copies to Staff.
2. Plot of surface casing annular pressures	Weekly	Resident Reservoir Engineer	To be reviewed with Underground Storage Staff twice yearly.
3. Bottomhole pressure	Annual	Resident Reservoir Engineer	Copies to Staff.
4. Temperature surveys	Annual	Resident Reservoir Engineer	Copies to Staff.
5. Wellhead inspections	Monthly	Station	Copy of report to Resident Reservoir Engineer.
6. Noise logs	As needed	Resident Reservoir Engineer	Copies maintained in Division and Underground Storage files.
7. Tracer surveys	As needed	Resident Reservoir Engineer, Staff will normally assist	A detailed explanation of methods and results to be prepared by Resident and copy sent to Underground Storage Staff.
8. Neutron logs	As needed	Underground Storage Staff	Copy to Division.

Table 5, Page 3

SUMMARY OF THE ALISO CANYON MONITORING PLAN

SURFACE OBSERVATIONS

ITEM	MINIMUM FREQUENCY OF DATA COLLECTION	PRIMARY RESPONSIBILITY	COMMENTS
1. Production from annular blowdowns	As needed	Station	Data to be plotted by Resident Reservoir Engineer.
2. Inspection of well cellars	Monthly	Station	Copy of report to Resident Reservoir Engineer.
3. Gas Scope survey of barholes	Annual	Station	Copy of report to Resident Reservoir Engineer.
4. Flame Ionization survey of abandoned wellsites	Annual	Pipeline	Copy of report to Resident Reservoir Engineer.
5. Flame Ionization survey of storage field pipelines	Annual	Pipeline	Copy of report to Resident Reservoir Engineer.
6. Monitoring production from nearby fields	Annual	Underground Storage Staff	Data to be plotted by Staff with copies to Resident Reservoir Engineer.

TABLE 6

ALISO CANYON
Losses Detected and Corrective Measures Taken
May 1988 through May 1989

<u>Well</u>	<u>Problem</u>	<u>Detected</u>	<u>Corrective Measures Taken</u>
IW 77	Shoe Leak	8/24/87	Well not killed because rate of leakage is low.
SS 17	Shoe leak	11/8/85	Well not killed because rate of leakage is low.
SS 29	Shoe Leak	9/24/87	Well not killed because rate of leakage is low.
SS 30	Shoe Leak	1986	Well not killed because rate of leakage is low.

SPR:hr
6/6/89

TABLE 7: ALISO CANYON WEEKLY ANNULUS REPORT

WELL NAME	WEEK 1	WEEK 2	WEEK 3	WEEK 4	WEEK 5	(WEEK 4) - (WEEK 3)	(WEEK 5) - (WEEK 4)
	9/21/88	9/30/88	10/12/88	10/5/88	10/20/88		
SURFACE ANNULUS							
IW 54	0	0	0	0	0	0	0
IW 56	85	80	9	90	90	81	0
IW 57	0	0	0	0	0	0	0
IW 58	1	0	0	0	0	0	0
IW 61	70	60	70	60	60	-10	0
IW 62	45	45	50	35	50	-15	15
IW 63	20	20	10	20	20	10	0
IW 64	40	30	50	50	45	0	-5
IW 65	5	1	0	2	0	2	-2
IW 66	1 >5		<5	0	5	0	5
IW 67	4 >5		<5	<5	0	0	0
IW 69	0	0	0	0	0	0	0
IW 70	0	0	0	0	0	0	0
IW 73	30	30	40	20	30	-20	10
IW 74	0	0	0	0	0	0	0
IW 75	3 >5		<5	10	5	10	-5
IW 76	4 >5		<5	<5	5	0	5
IW 77	0	0	0	0	0	0	0
IW 78	0	0	0	0	0	0	0
IW 79	0	0	0	0	0	0	0
IW 80	0	0	0	0	0	0	0
IW 81	0	0	0	0	0	0	0
IW 82	0	0	0	0	0	0	0
IW 83	0	0	0	0	0	0	0
FF 31	0	0	0	0	0	0	0
FF 32	2	0	0	0	0	0	0
FF 32A	1	0	0	0	0	0	0
FF 33	0	0	0	0	0	0	0
FF 34A	1	0	0	0	0	0	0
FF 34B	1	0	0 <5		0	0	0
P 12	20	10	0	0	0	0	0
P 26	40	40	40	40	40	0	0
P 30	0	0	0	0	0	0	0
P 32	80	0	0	0	0	0	0
P 34	0	0	0	0	0	0	0
P 35	0	0	0	0	0	0	0
P 36	3	5	2	2	1	0	-1
P 37	0	0	0	0	0	0	0
P 37A	0	0	0	0	0	0	0
P 38	0	0	0	0	0	0	0
P 39	0	0	0	0	0	0	0
P 40	0	0	0	0	0	0	0
P 42A	0	0	0	0	0	0	0
P 42B	5	5	3	5	5	2	0
P 42C	0	0	0	0	0	0	0

TABLE 7: ALISO CANYON WEEKLY ANNULUS REPORT

Page 2

WELL NAME	WEEK 1 9/21/88	WEEK 2 9/30/88	WEEK 3 10/12/88	WEEK 4 10/5/88	WEEK 5 10/20/88	(WEEK 4)-(WEEK 5)- (WEEK 3) (WEEK 4)	
P 44	5	2	2	5	0	3	-5
P 45	0	0	0	0	0	0	0
P 46	0	0	0	0	0	0	0
P 47	0	0	0	0	0	0	0
P 50A	0	0	0	0	0	0	0
P 68A	10	3	2	2	2	0	0
P 69A	0	0	0	0	0	0	0
PS 42	0	0	0	0	0	0	0
F 2	0	0	0	0	0	0	0
F 3	20	0	0	<5	<10	0	0
F 4	0	0	0	0	0	0	0
F 5	0	0	0	0	0	0	0
F 7	0	0	0	0	0	0	0
SS 2	0	0	0	0	0	0	0
SS 3	0	0	0	0	0	0	0
SS 4	0	0	0	0	0	0	0
SS 5	0	0	0	0	0	0	0
SS 6	0	0	0	0	0	0	0
SS 7	0	0	0	0	0	0	0
SS 8	0	0	0	0	0	0	0
SS 9	0	0	0	0	0	0	0
SS 10	0	0	0	0	0	0	0
SS 11	0	0	0	0	0	0	0
SS 17	0	0	0	0	0	0	0
SS 24	0	0	0	<5	<10	0	0
SS 25	0	0	0	0	0	0	0
SS 29	0	0	0	0	0	0	0
SS 31	0	0	0	0	0	0	0
SS 44	0	0	0	0	0	0	0
W 3A	50	50	50	50	55	0	5
PF 1	0	0	0	0	0	0	0
PF 2	45	40	40	40	40	0	0
MA 1A	0	0	0	0	0	0	0
MA 1B	5	10	10	10	5	0	-5
MA 3	1	0	0	0	0	0	0
MA 4	1	0	0	0	0	0	0
MA 5A	1	0	0	<5	0	0	0
DA 1	0	0	0	0	0	0	0
FF 34	0	0	0	0	0	0	0
FF 35	18	15	18	18	19	0	1
IW 55	0	0	0	0	0	0	0
IW 60	2	2	3	2	10	-1	8
P 14	80	85	80	90	90	10	0
P 25	0	0	0	0	0	0	0
P 42	0	0	0	0	0	0	0
SS 1	0	0	0	0	0	0	0

TABLE 7: ALISO CANYON WEEKLY ANNULUS REPORT

Page 3

WELL NAME	WEEK 1	WEEK 2	WEEK 3	WEEK 4	WEEK 5	(WEEK 4) - (WEEK 5) -	
	9/21/88	9/30/88	10/12/88	10/5/88	10/20/88	(WEEK 3) (WEEK 4)	
SS 1-0	0	0	0	0	0	0	0
SS 4-0	0	0	0	0	0	0	0
W 3	1	1	2	1	2	-1	1
F 6	1	0	0	0	0	0	0
F 8	0	0	0	0	0	0	0
F 9	0	0	0	0	0	0	0
SF 1	0	0	0	0	0	0	0
SF 2	0	0	0	0	0	0	0
SF 3	0	0	0	0	0	0	0
SF 4	0	0	0	0	0	0	0
SF 5	0	0	0	0	0	0	0
SF 6	65	65	60	65	70	5	5
SF 7	0	0	0	0	0	0	0
SF 8	0	0	0	0	0	0	0
SS 12	0	0	0	0	0	0	0
SS 13	0	0	0	0	0	0	0
SS 14	0	0	0	0	0	0	0
SS 16	0	0	0	0	0	0	0
SS 30	0	0	0	0	0	0	0
INNER ANNULUS							
IW 63	80	90	95	90	0	-5	-90
IW 65	0	0	0	0	0	0	0
FF 32	1	0	0	0	1	0	1
P 12	0	0	0	0	0	0	0
P 26	10	10	10	10	5	0	-5
P 30	0	0	0	0	0	0	0
P 32	0	0	0	0	2	0	2
P 45	0	0	0	0	0	0	0
P 69A	0	0	0	0	0	0	0
F 3	2	0	0	<5	0	0	0
F 4	0	0	9	<10	0	-9	0
SS 3	0	0	0	0	0	0	0
SS 4	0	0	0	0	0	0	0
SS 5	0	0	0	0	0	0	0
SS 6	0	0	0	0	0	0	0
MA 1B	4	5	5	20	4	15	-16
SS 1	0	0	0	0	0	0	0
SS 1-0	0	0	0	0	0	0	0
SS 4-0	0	0	0	0	0	0	0
SF 1	120	140	155	160	160	5	0
SS 12	100	90	70	80	60	10	-20
ANNULUS 3							
P 12	0	0	5	5	5	0	0

RUN DATE : 02/12/88 START DATE : 03/01/88 END DATE : 05/31/88
 DIVISION : NORTH BASIN SURVEY ID : DA-2 COMMENTS : NON-COMPANY
 (26) ORG CODE : JBO CRITICAL: YES TYPE: WELL INSPECT: INSTRUMENT CLASS LOC (CYCLE): ANNUAL (1) LENGTH: 0.00

SOUTHERN CALIFORNIA GAS COMPANY
 LEAKAGE SURVEY INSPECTION REPORT

ENTERED MAR 9 1988

REPORT NO. L44570-1

ENDING DATE: 3/3/88
 SURVEYED BY: DL, MV
 REASON: Location

STARTING DATE: 3/3/88
 REVIEW BY: F.I.
 METHOD: F.I.

BAR HOLE SUMMARY

NUMBER MADE: _____
 SURFACE: _____
 PERMIT NO: _____

REPAIRED: _____

REMARKS

LEAK INDICATIONS FOUND

DATE WORKED
 TIME STARTED STOPPED
 LOCATION STARTED STOPPED

1	3-3-88	11:53	DA-2	070	
2				070	
3				070	
4	3-3-88	11:54	DA-2	070	
5					

ADDTL WORK ORDER ISSUED DATE COMPLETED

TABLE 8. BARHOLE READING FOR WELLSITE SURFACE EMISSION

TABLE 9. FIELD HELIUM COUNTS

TEST & DEVELOPMENT CENTER REPORT

Project No: C-41

Reported By: L.K.M. Comar
Report Date: 3-7-89

Request:

Test gas for helium content on Texaco Chevron
and gas company wells at Aliso Canyon

Requested By: S.P. Robinson Mail Location: 9380 Request Date: 2-1-89

Division/
Work Group:

North Basin/UGS

First Quarter Helium tests were completed
using an in-truck Shimadzu gas chromatograph.
A total of eighty-eight Helium tests were made
with no significant increases of Helium noted
since last tested in fourth quarter of 1988.

Please see attached report on Helium results

Tested By:

L.K.M. Comar

Approved By:

W. Williams 3/8/89

C-41

1ST QUARTER 1989 YEAR

SoCalGas-147.0029

PRESSURE


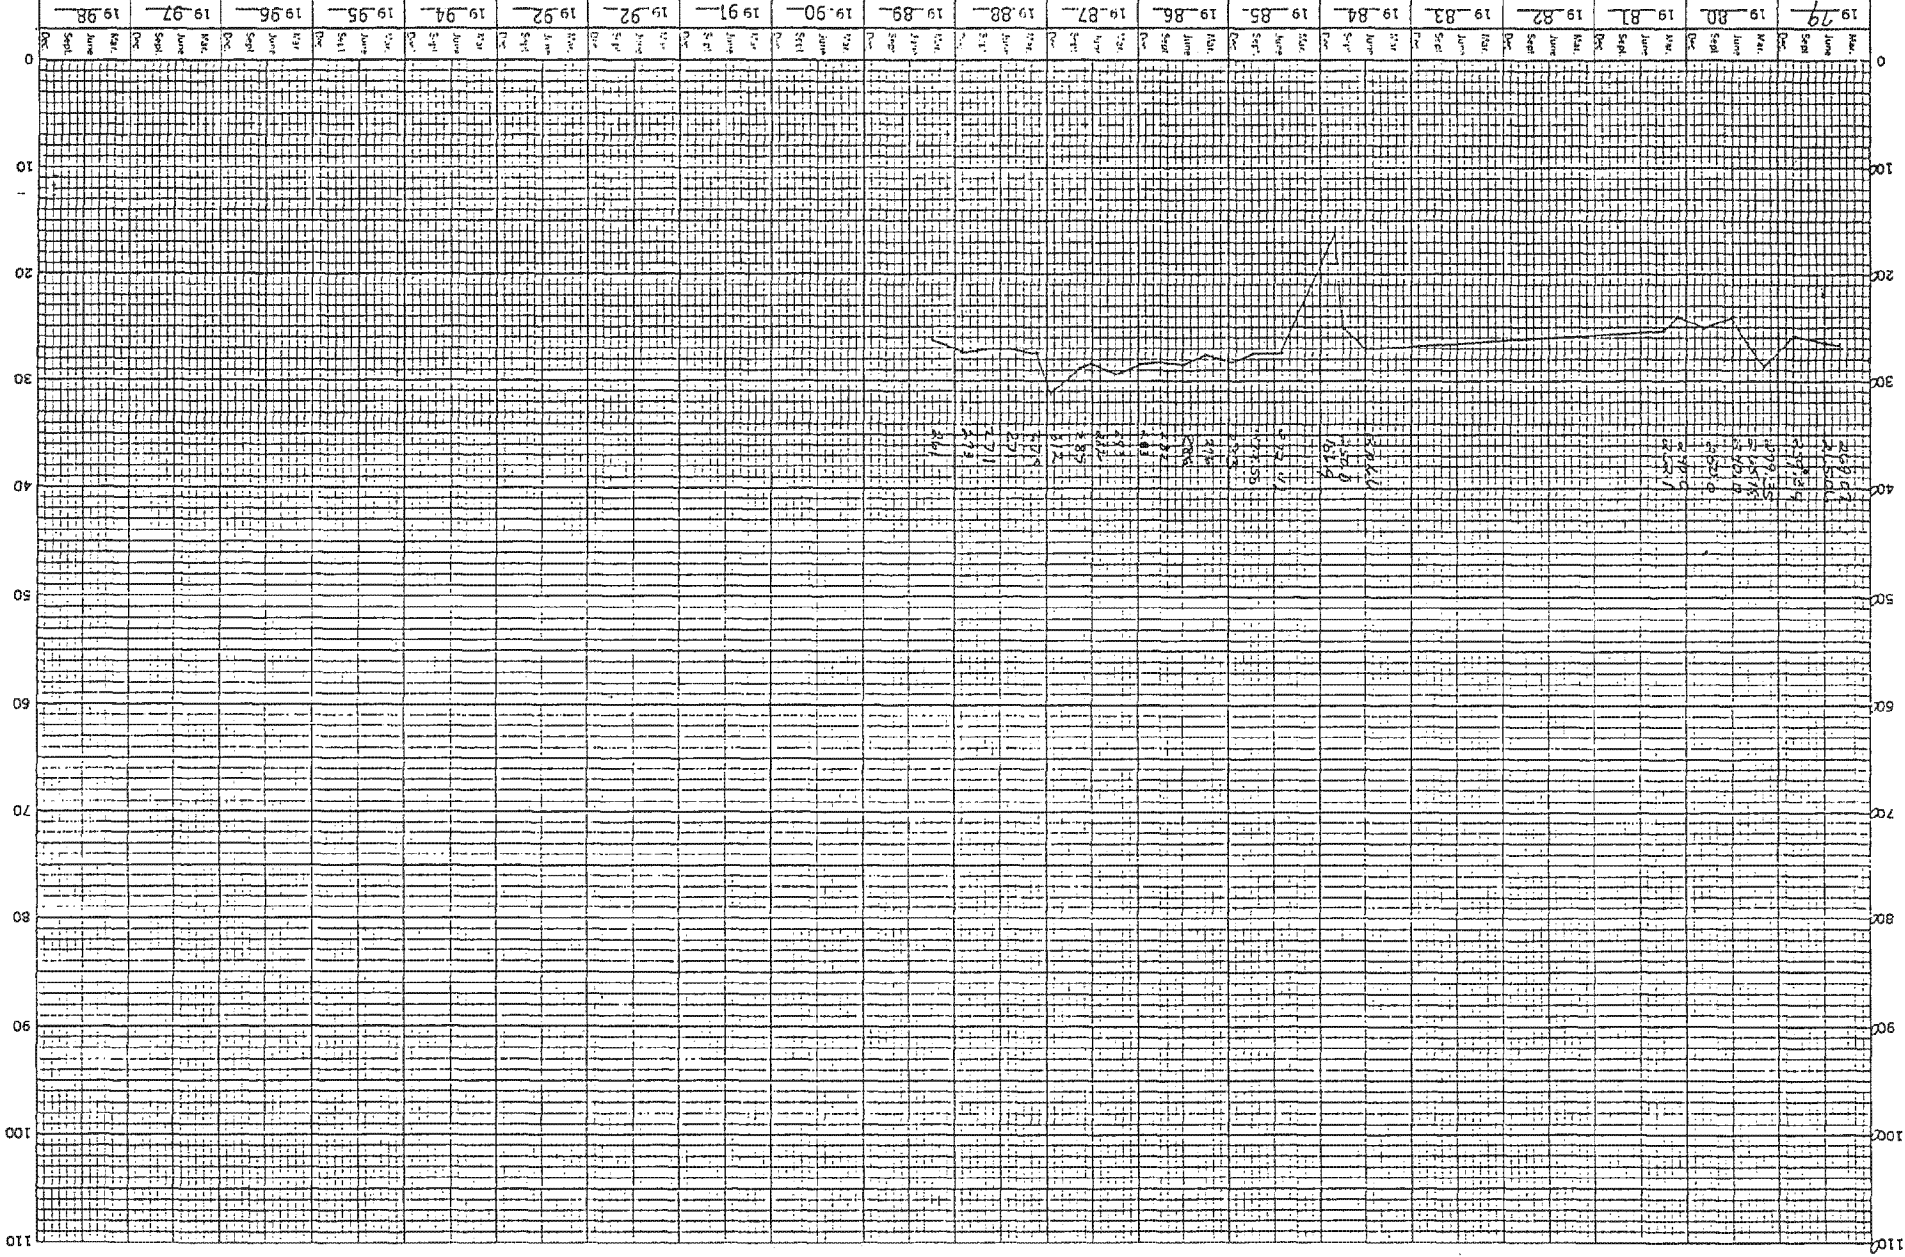


FIGURE 11a. DEL ALISO SURFACE PRESSURE

FIGURE 11b. PORTER 14 SURFACE PRESSURE

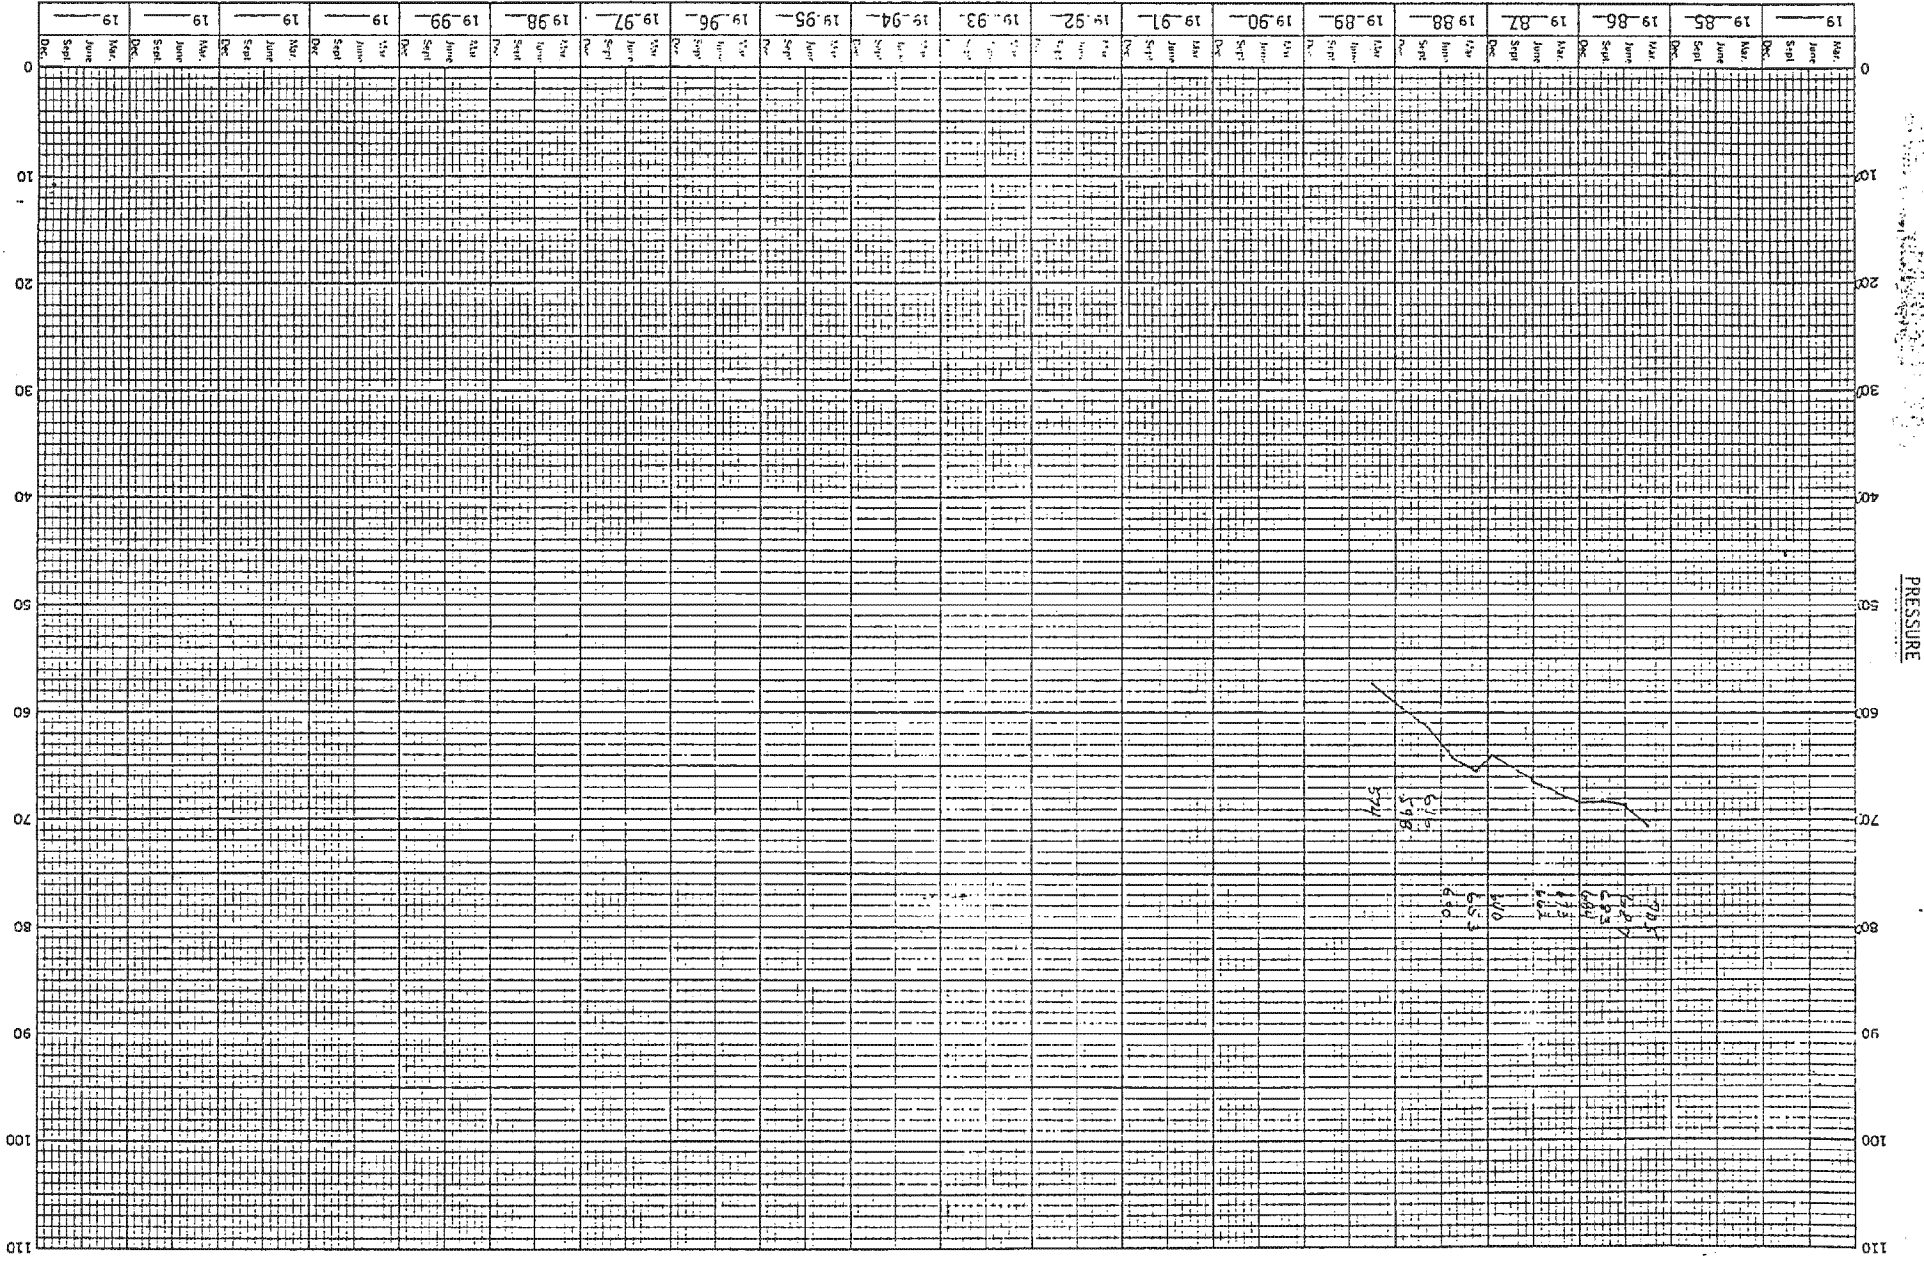

Mid-Point Pressure = 46.90 P-14

FIGURE 11c. STANDARD SESNON 1-O SURFACE PRESSURE


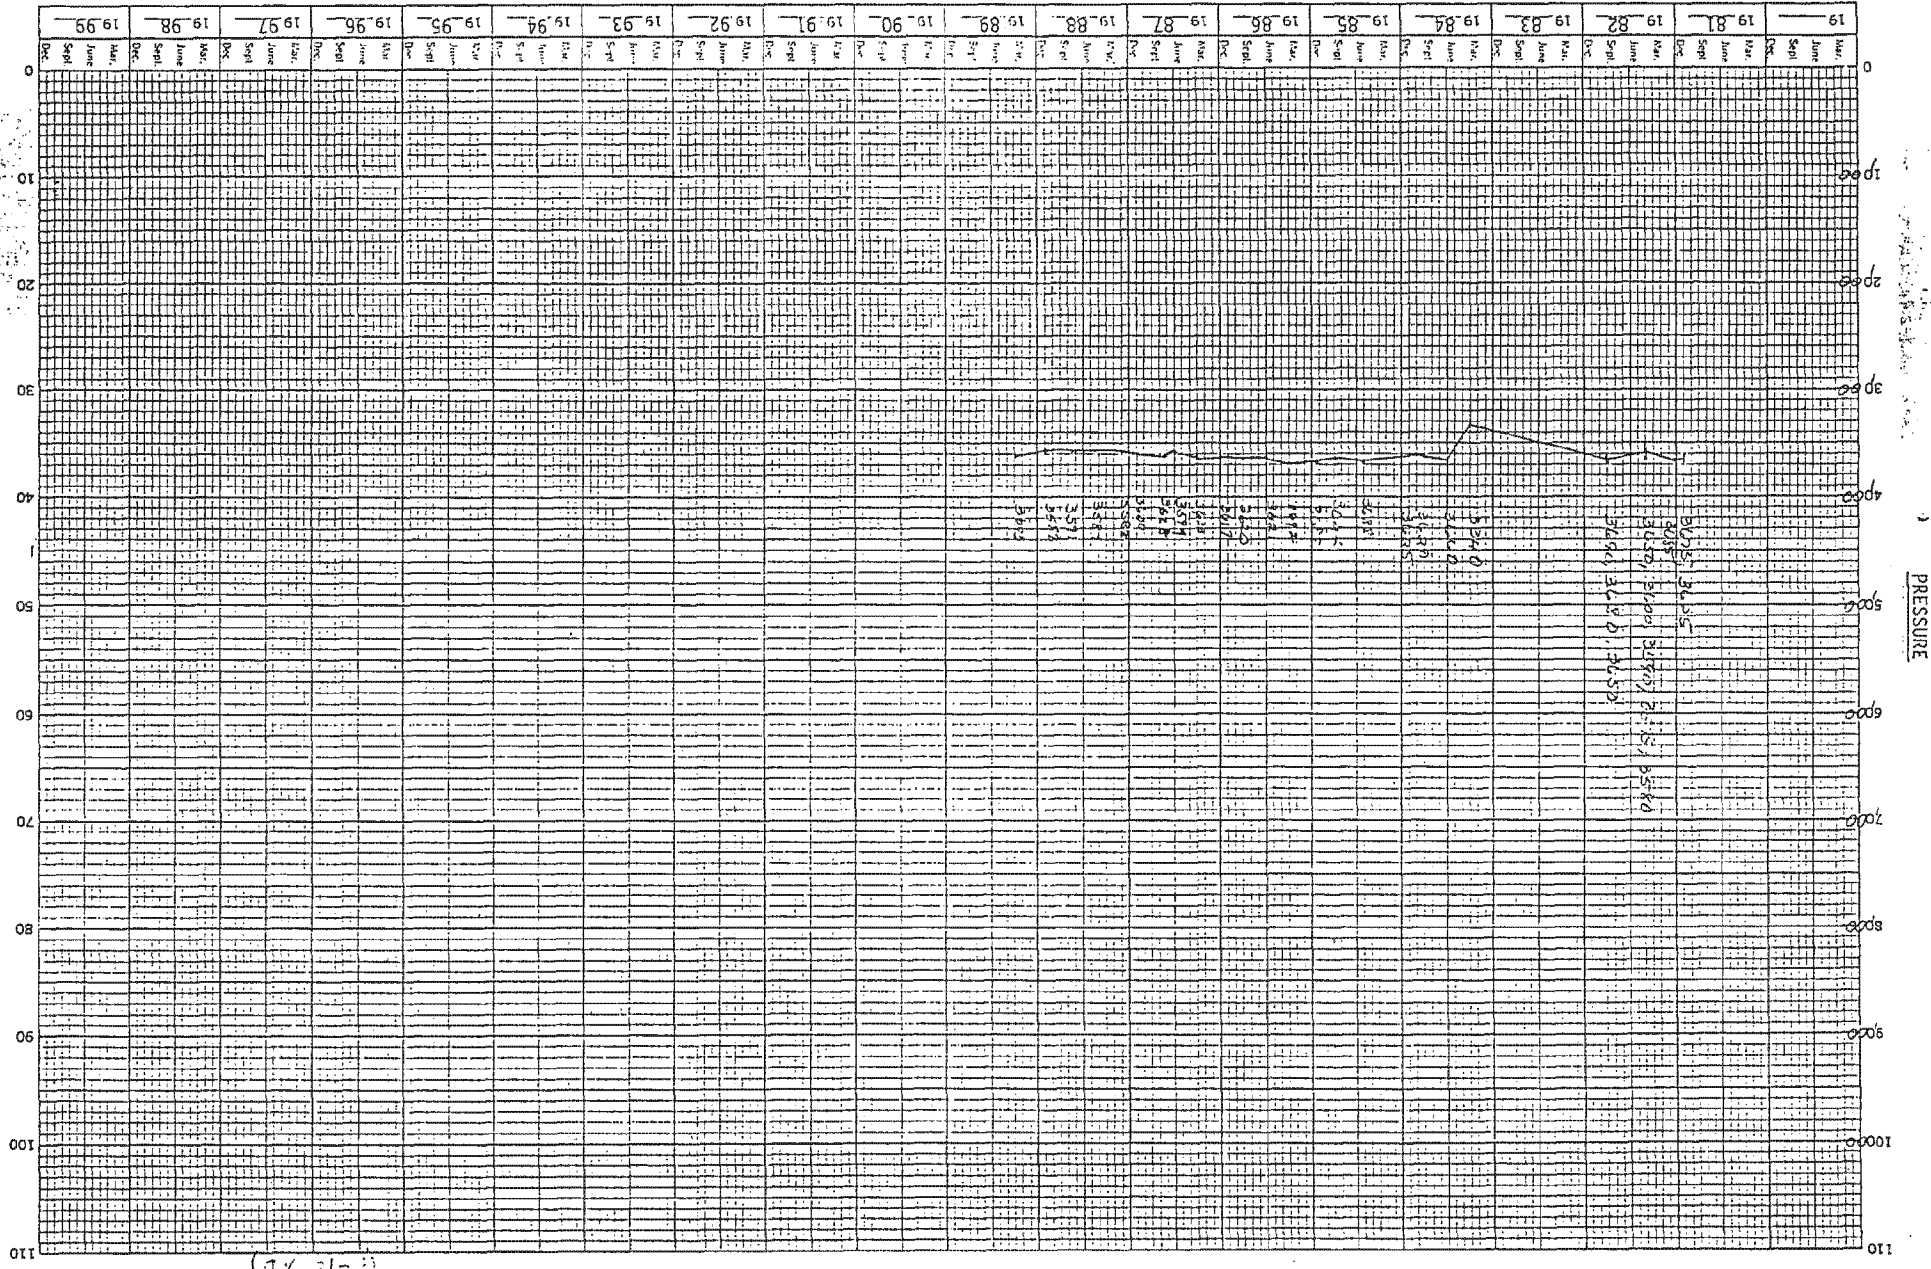


FIGURE 11d. WARD 3 SURFACE PRESSURE

ALL POINTS PLOTTED
 AFTER DUMBY INSTALLED IN G.I. M. TO ISOLATE TB6, 4 C56, 4-28-86
 MPP PLCT DEPTH CHANGED TO 6300'
 JDM

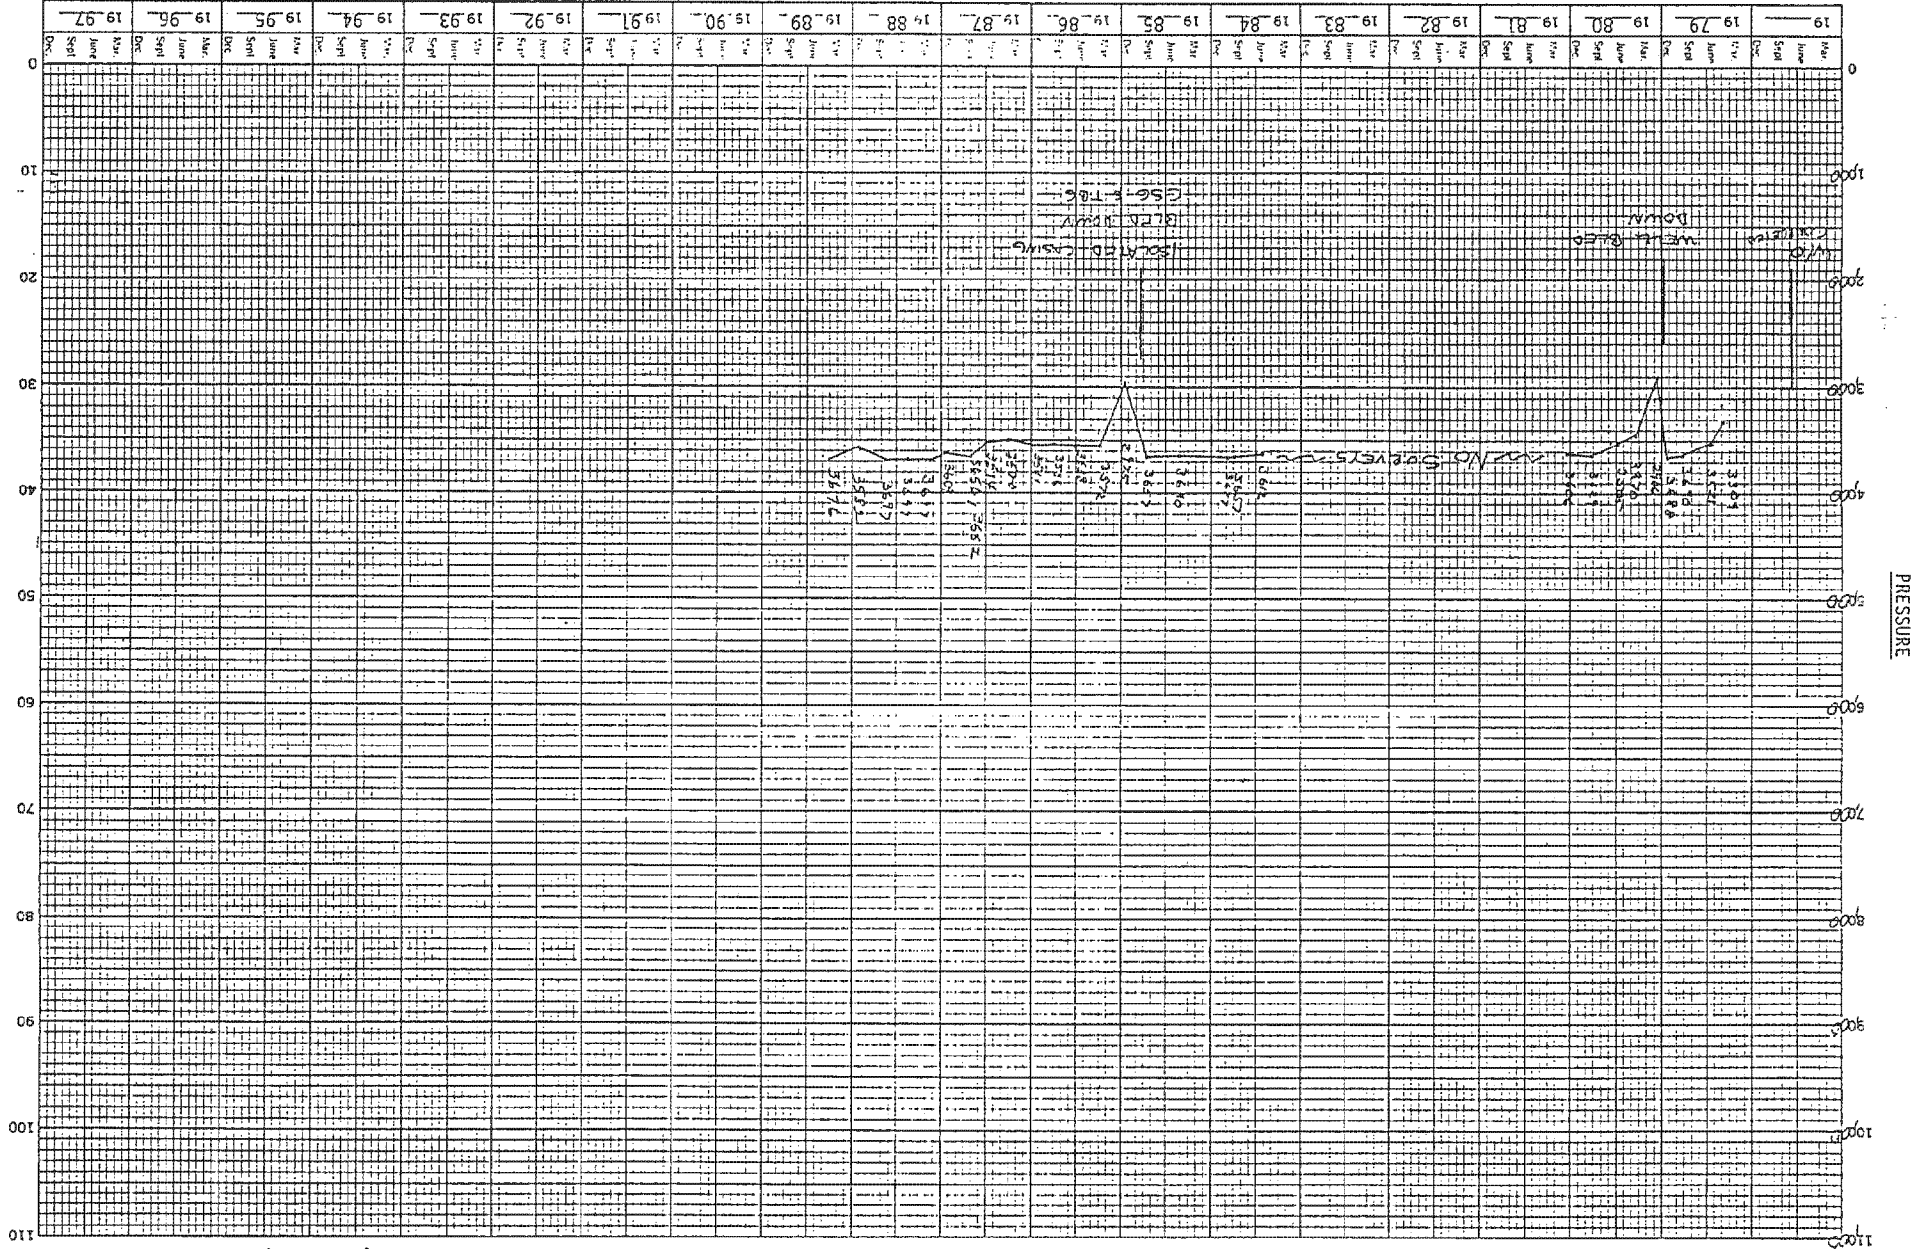

Mid-Point Pressure = 6300' TW
 (6324' MD)
 W-3

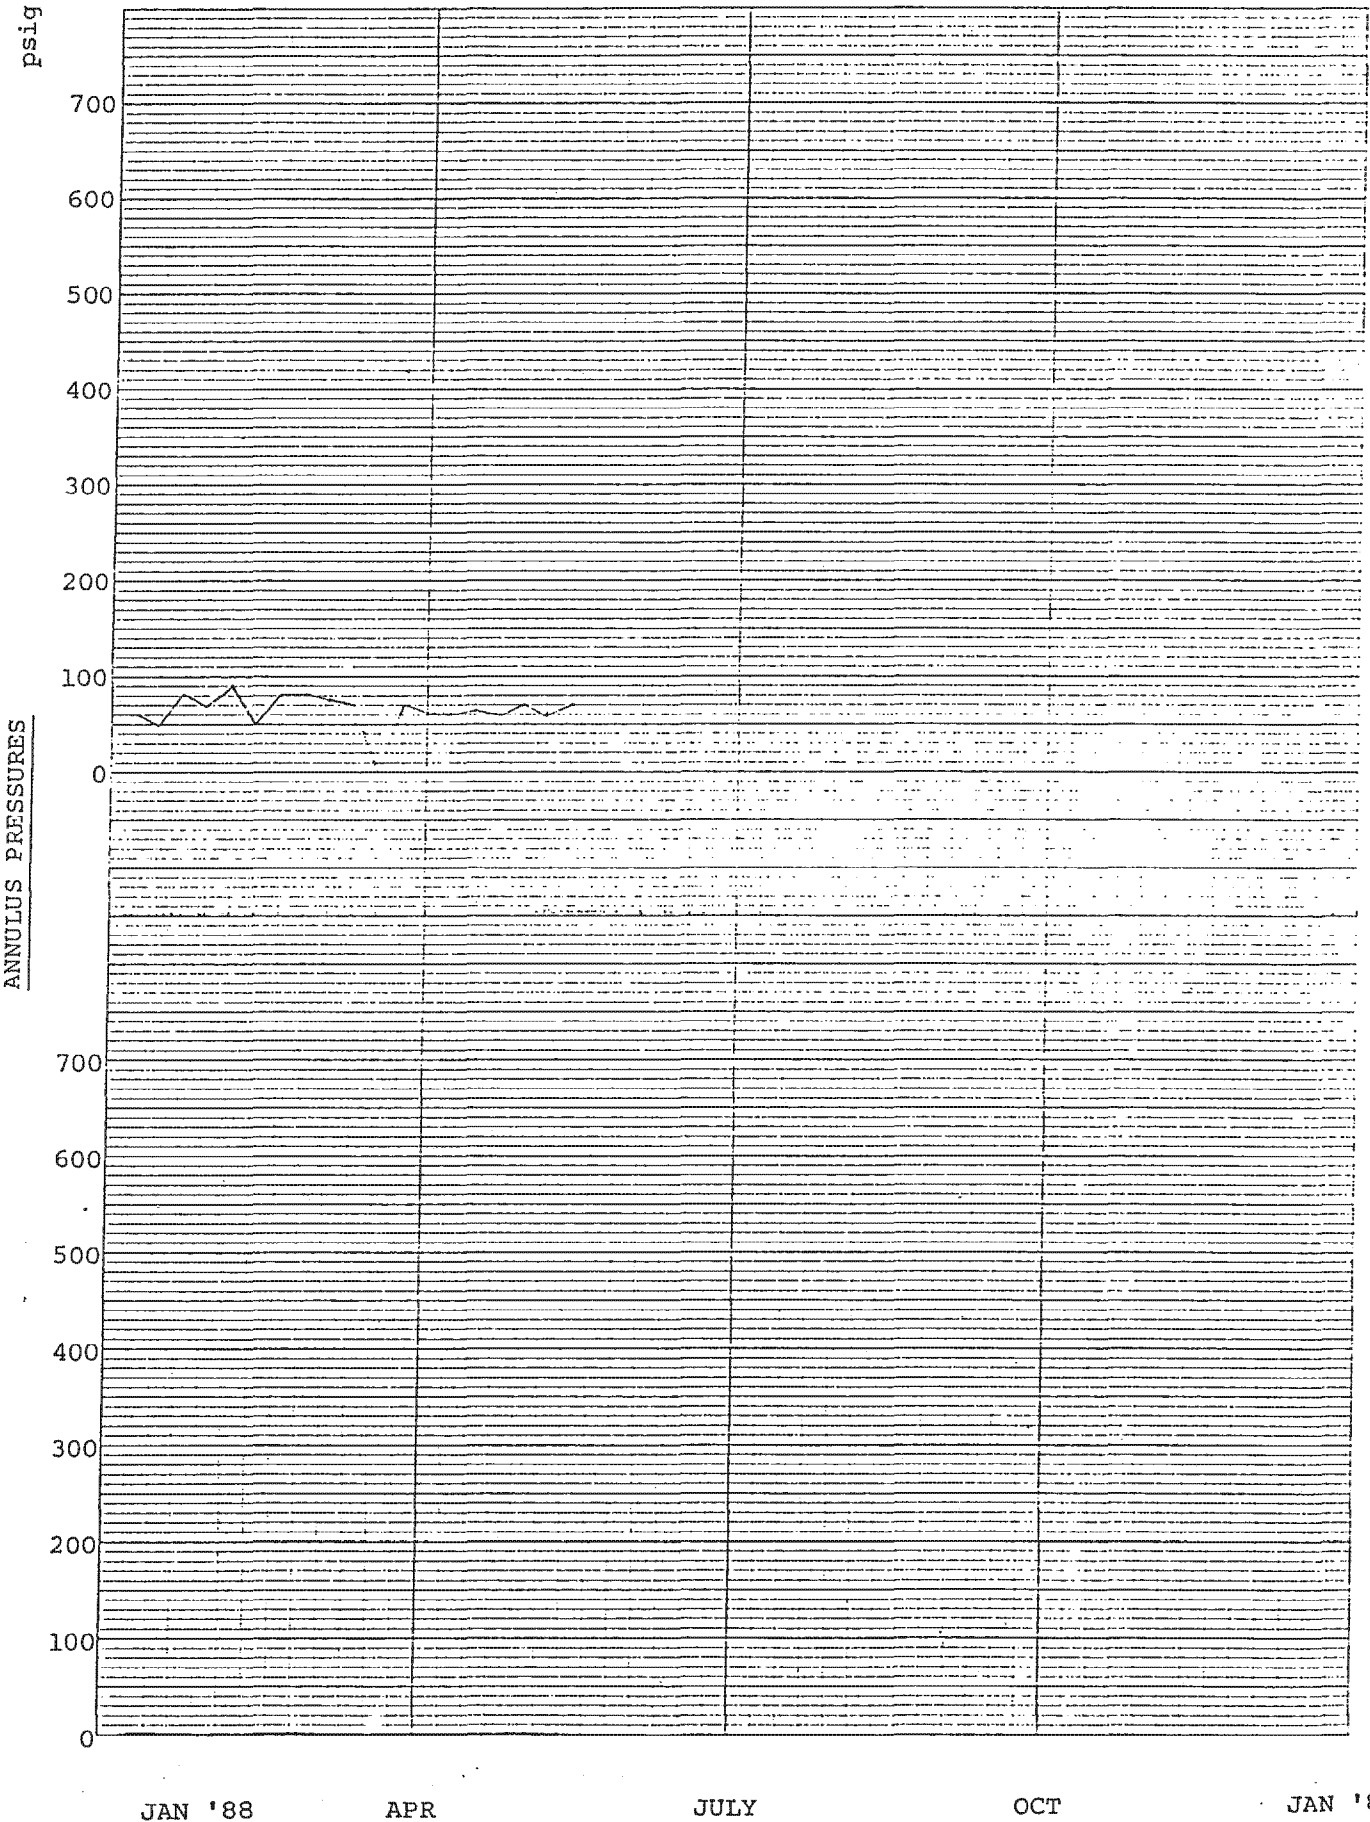


FIGURE 12. ANNULAR PRESSURE PLOT


SHIFT IN 13 DAYS PRIOR TO SURVEY.
 HOURS 117 HOURS PRIOR 1 PUT IN.

ALISO CANYON

IW 63

46 1512

1/2" IN X 10 IN THERMISTOR
 1/2" IN X 10 IN THERMISTOR

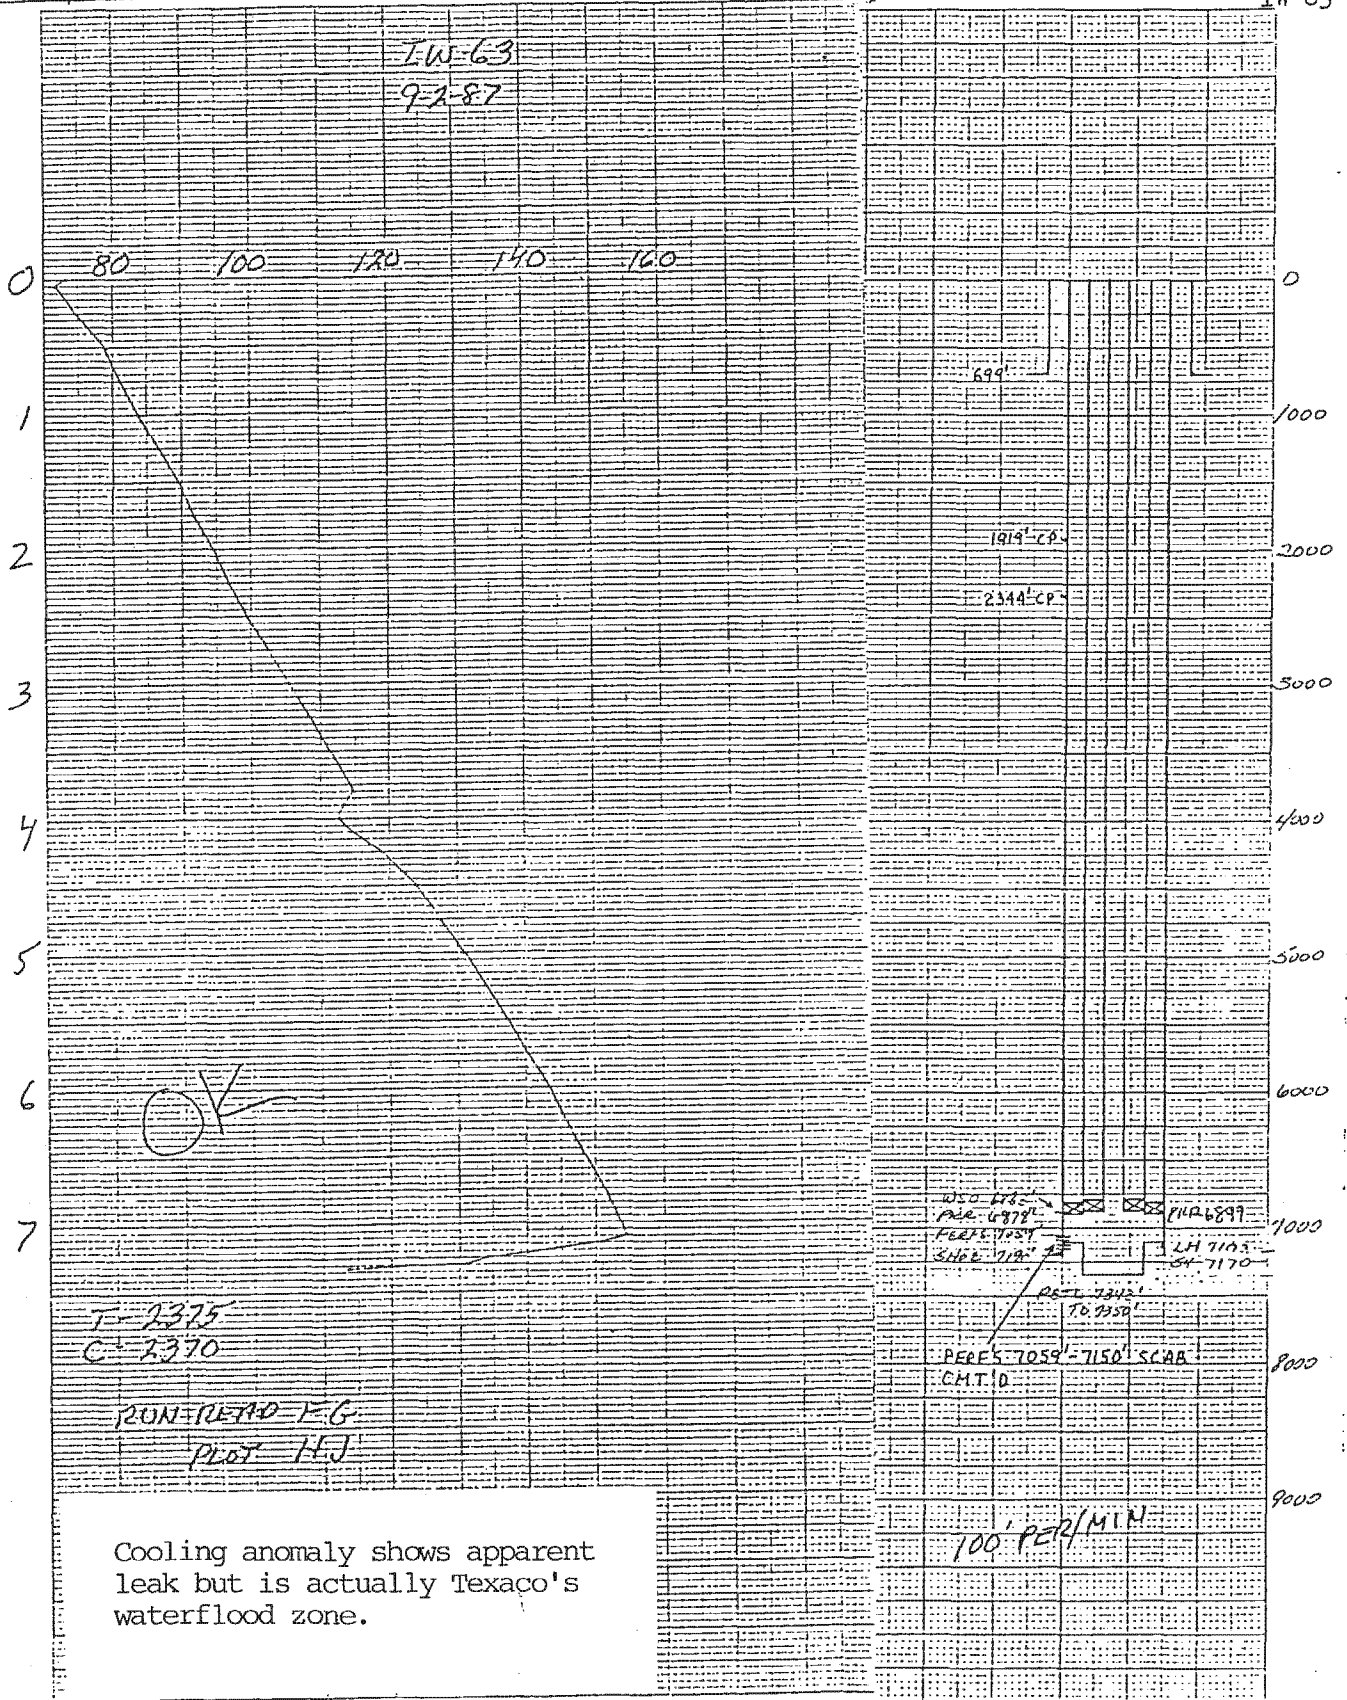

10/6/87 RES 4-25-84

FIGURE 13. TEMPERATURE SURVEY

FIGURE 14


LO-LOG INC.

TEMPERATURE AND NOISE LOG

TYPE OF FLUID IN HOLE		WATER & GAS		FLUID LEVEL		NONE OBSERVED	
LOG RECORDED BY		B. CLAR		WITNESSED BY		STEVE ROBINSON	
CASING AND TUBING RECORD				WELL STATUS SHUT IN GAS STORAGE			
Size	Weight	From	To	Pressure	Producing	Injecting	Shut-in
13-3/8"	54#	ZERO	1014'	TBG			2500 PSI
8-5/8"	40 & 36	ZERO	7347'	CSG			2500 PSI
6-5/8"	24#	ZERO	7213'	INJ RATE	ZERO	TYPE	
5-1/2"	20#	7347'	7512'	OBS. RATE			
TUBING		2-7/8" TO 7512'		METERED	Oil	Gravity	*API
PACKER(S)		7213' & 7183'		PRODUCTION	Water		
MANDREL(S)		7084', 7115', 7150'		RATES	Gas		
PERFORATIONS		7347' to 7512'		BOTTOM TEMPERATURE 169°			
LOGGING UNIT		711		LINE SIZE		3/16"	
TOOLS USED		(3) 5' BARS, COLLAR LOCATOR, TEMPERATURE, CAPACITANCE, NOISE		LINE LENGTH		19000'	
TOOL NUMBERS						4051	
DIAMETER		1-3/8"					
RESULTS AND REMARKS: NOISE LOG INDICATES GAS MIGRATION UP TO 7220'.							
NO GAS APPEARS TO LEAK PAST THE WSO @ 7203'							


11-30-88
LOS ANGELES
STATE CA.
SOUTHERN CALIFORNIA GAS CO.
MISSION ADRIAN 1-B
ALISO CANYON

PURPOSE OF SURVEY
CHECK CASING SHOE AND WSO

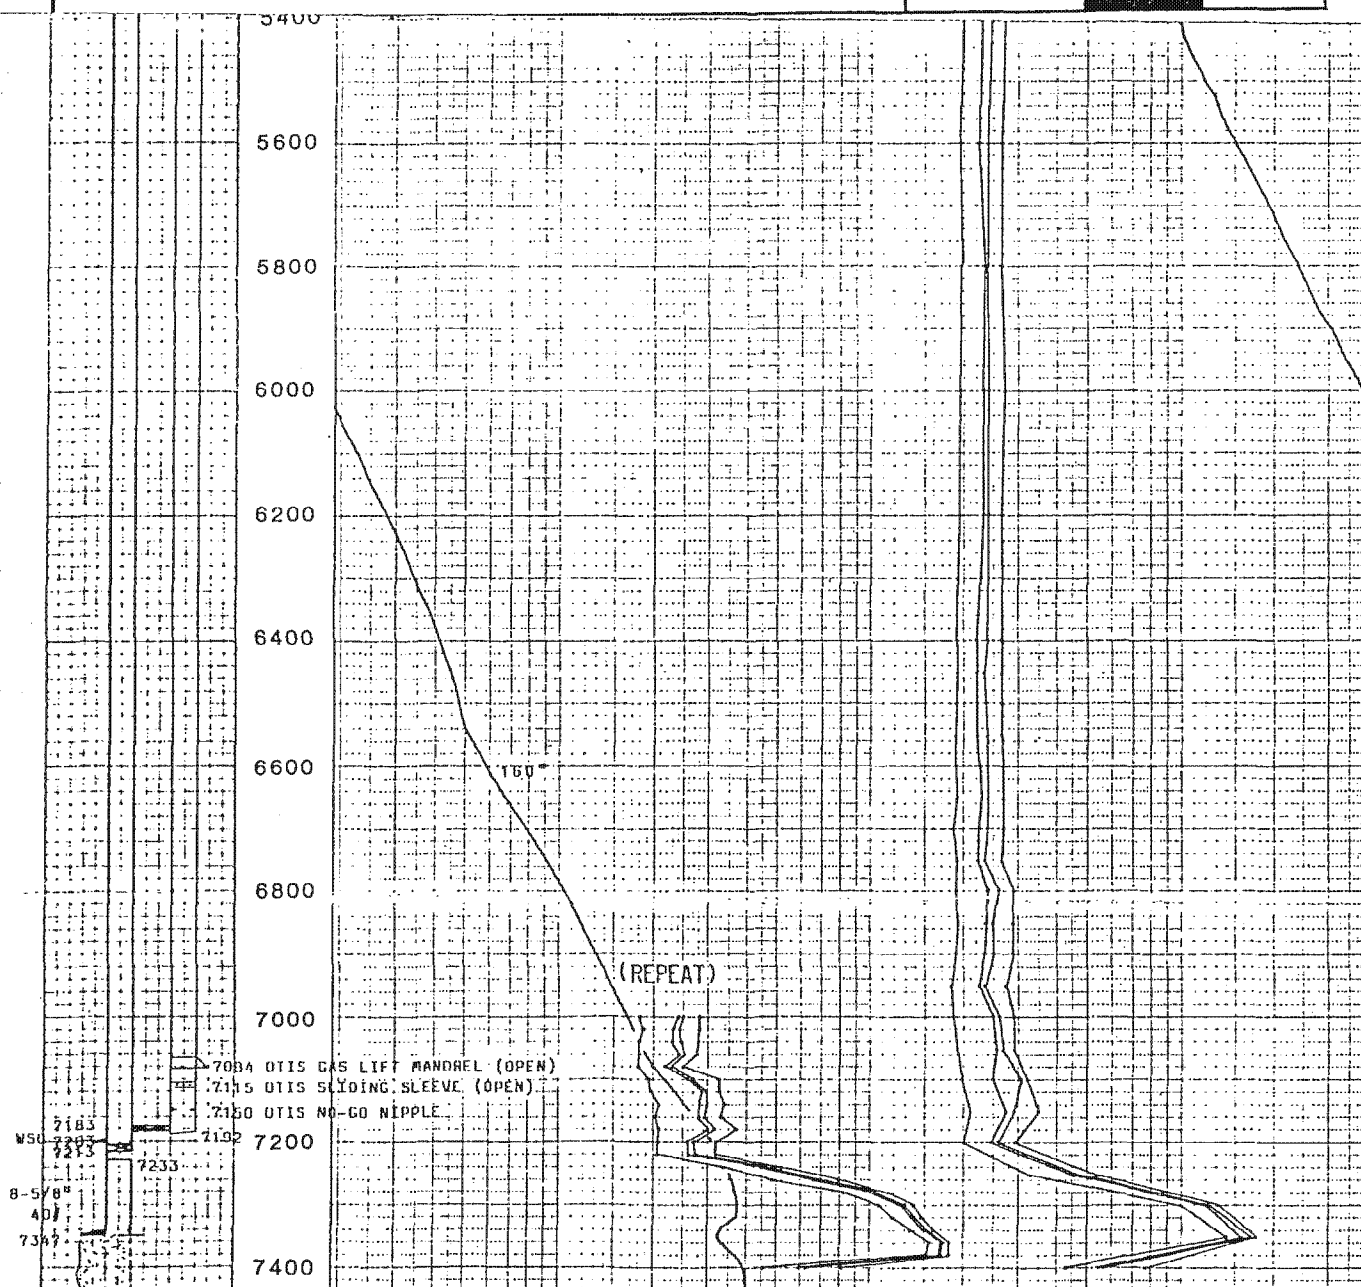


Aliso_Canyon_DOGGR_0004975
AC_CPUC_SED_DR_27_0003019


SoCalGas-147.0036

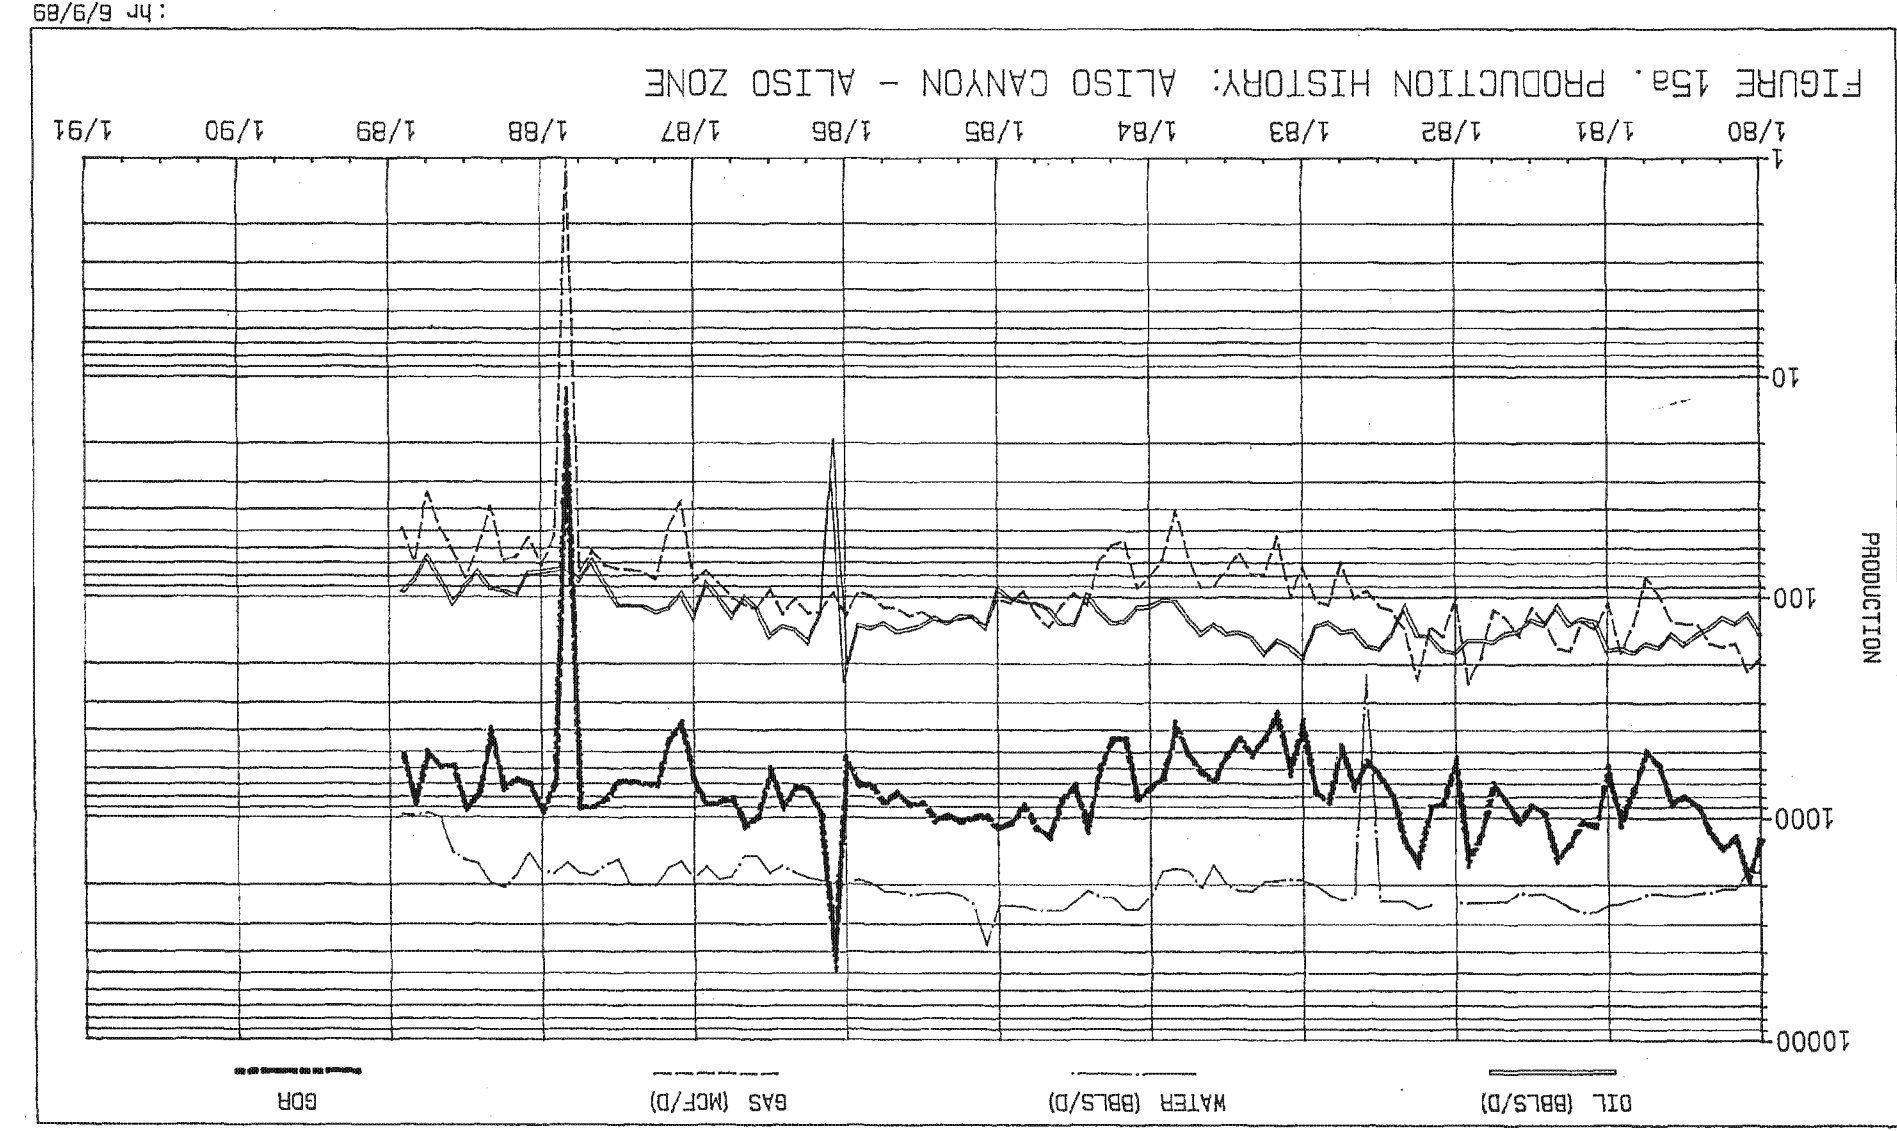


hr 6/9/89

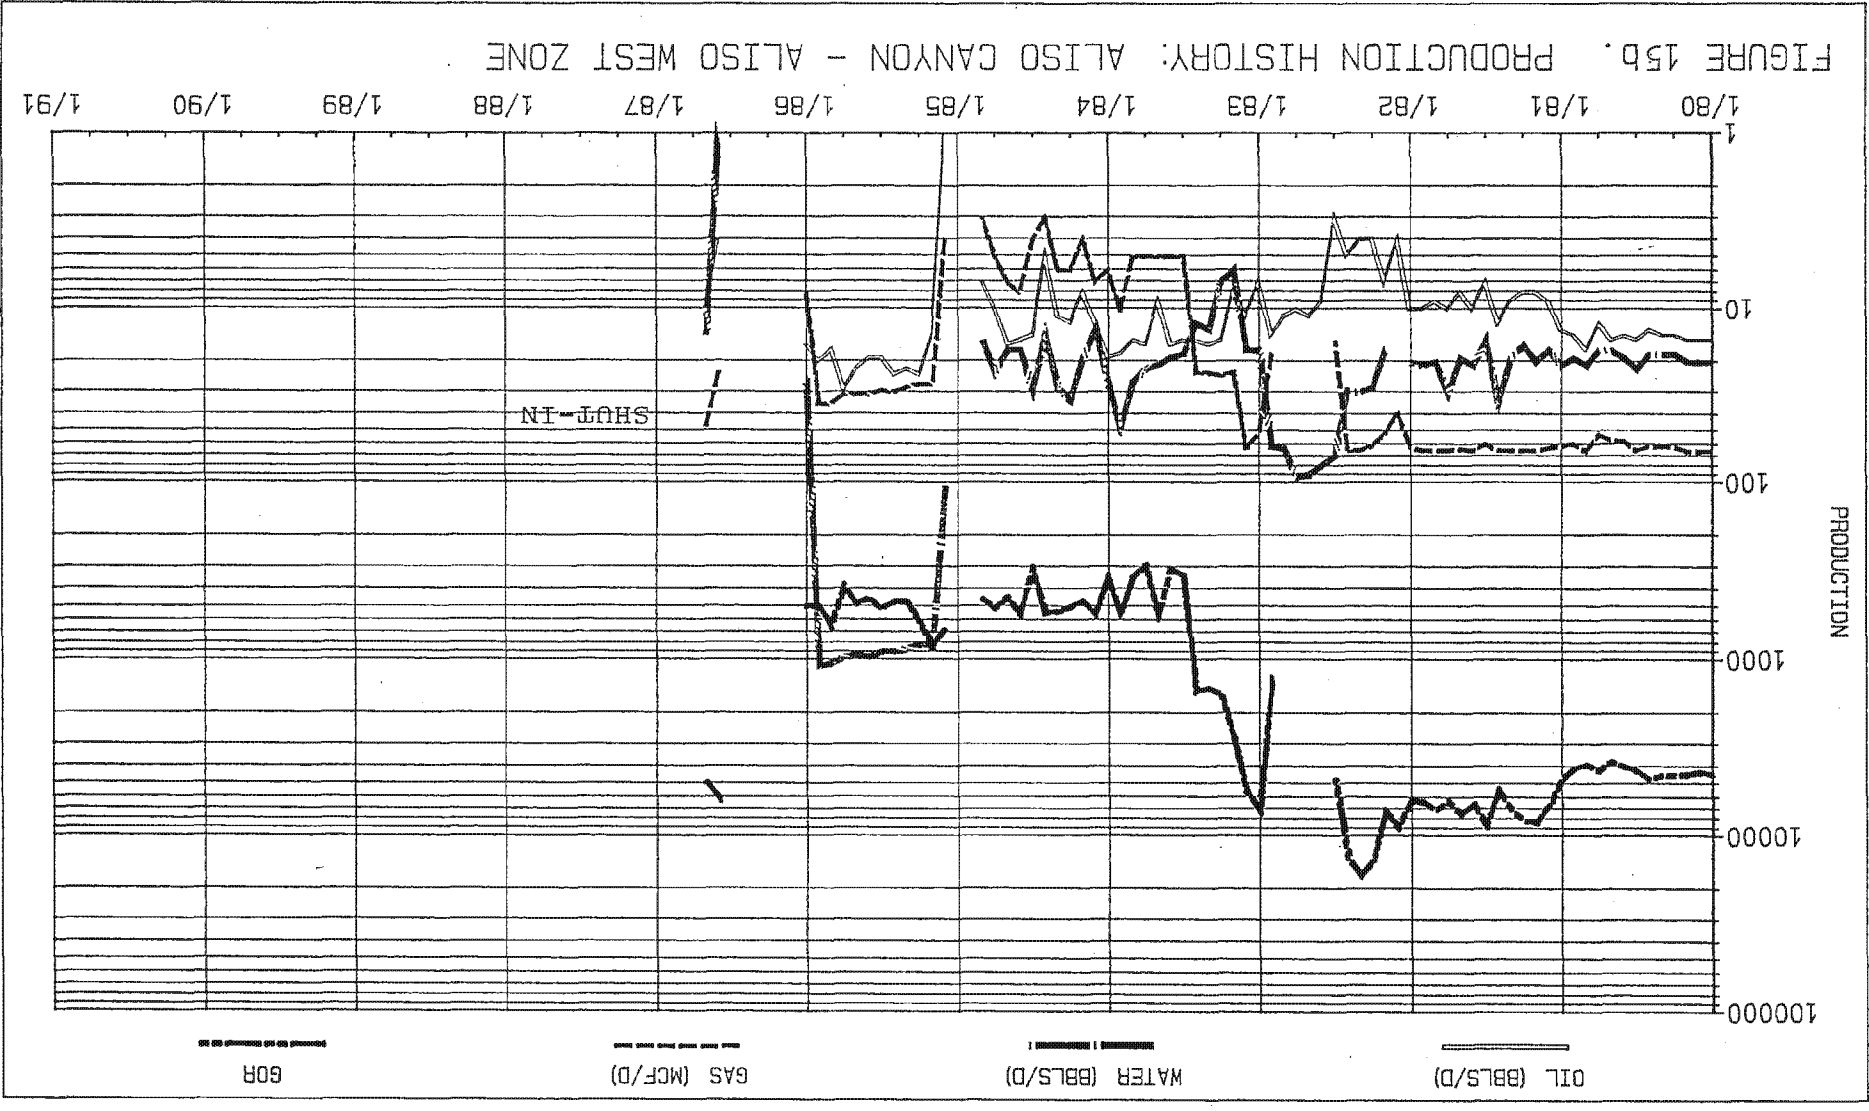


Aliso_Canyon_DOGGR_0004978
AC_CPU_C SED_DR_27_0003022

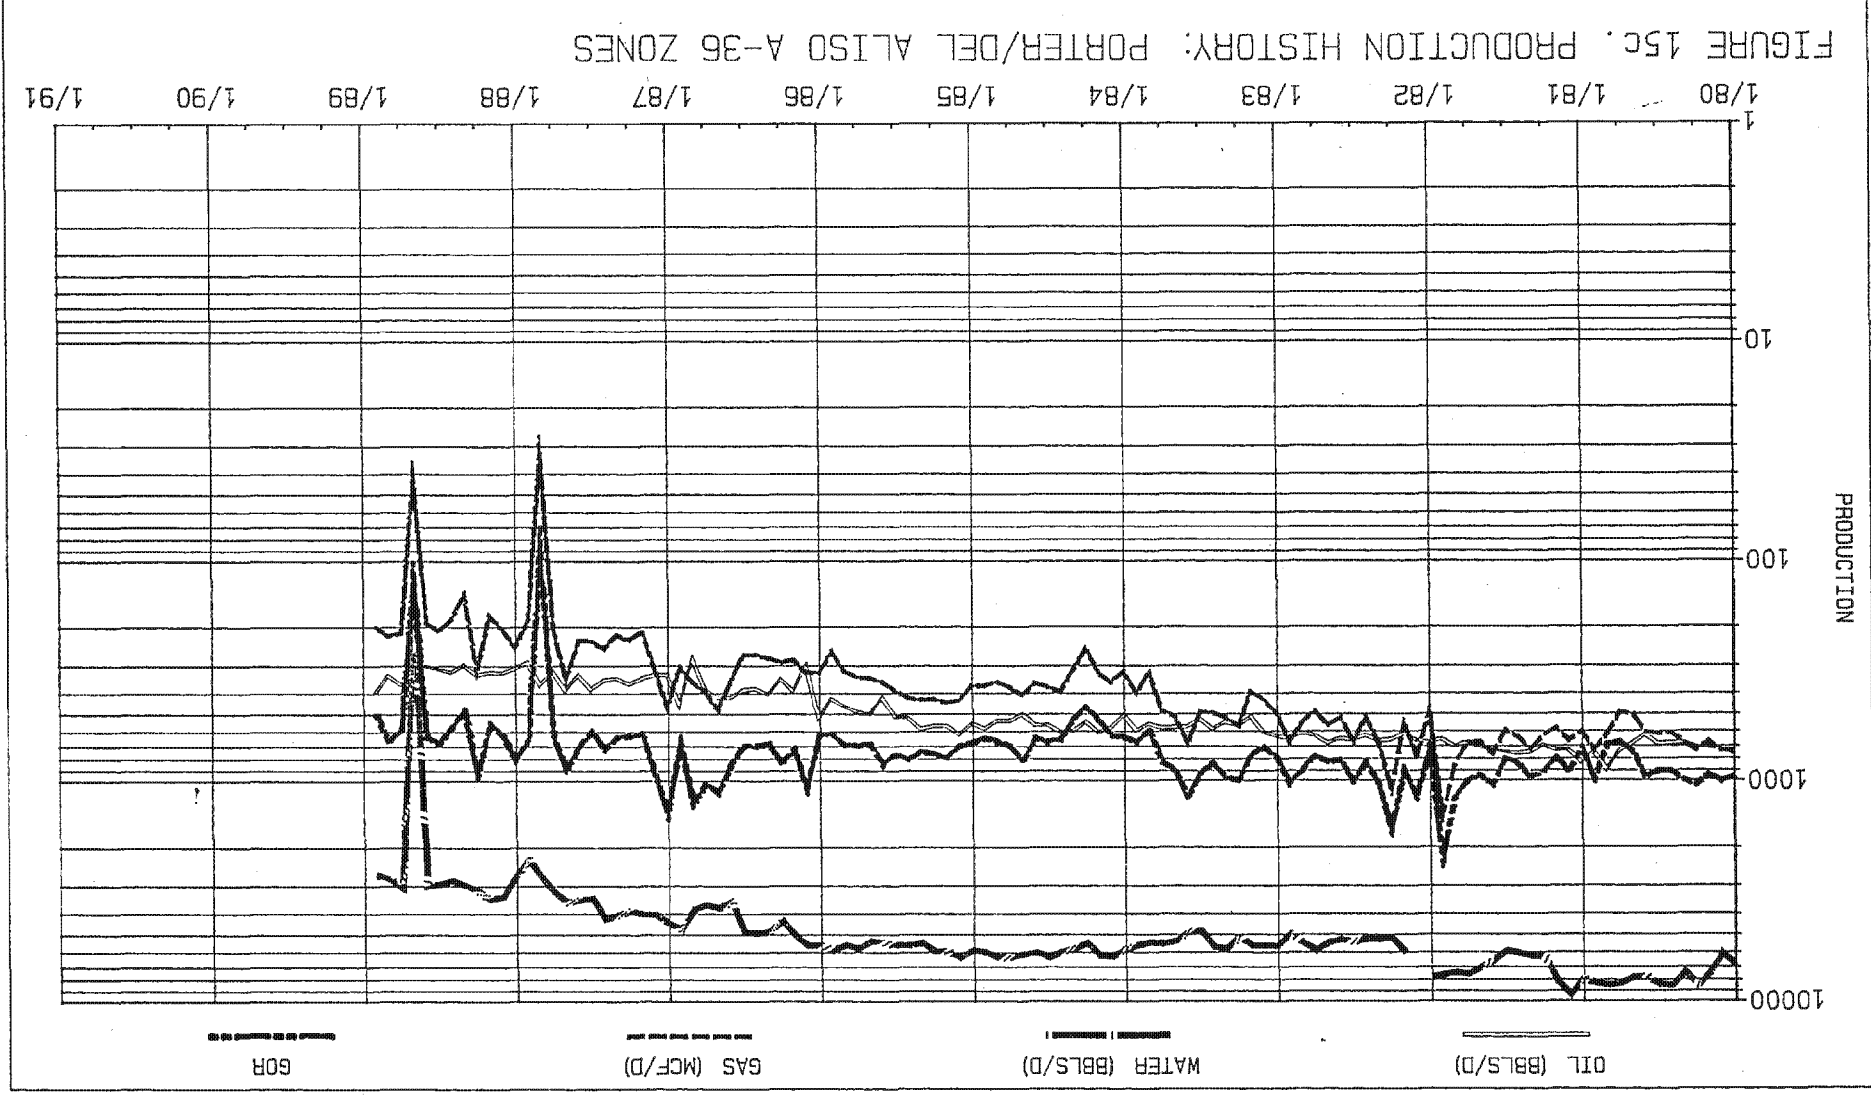


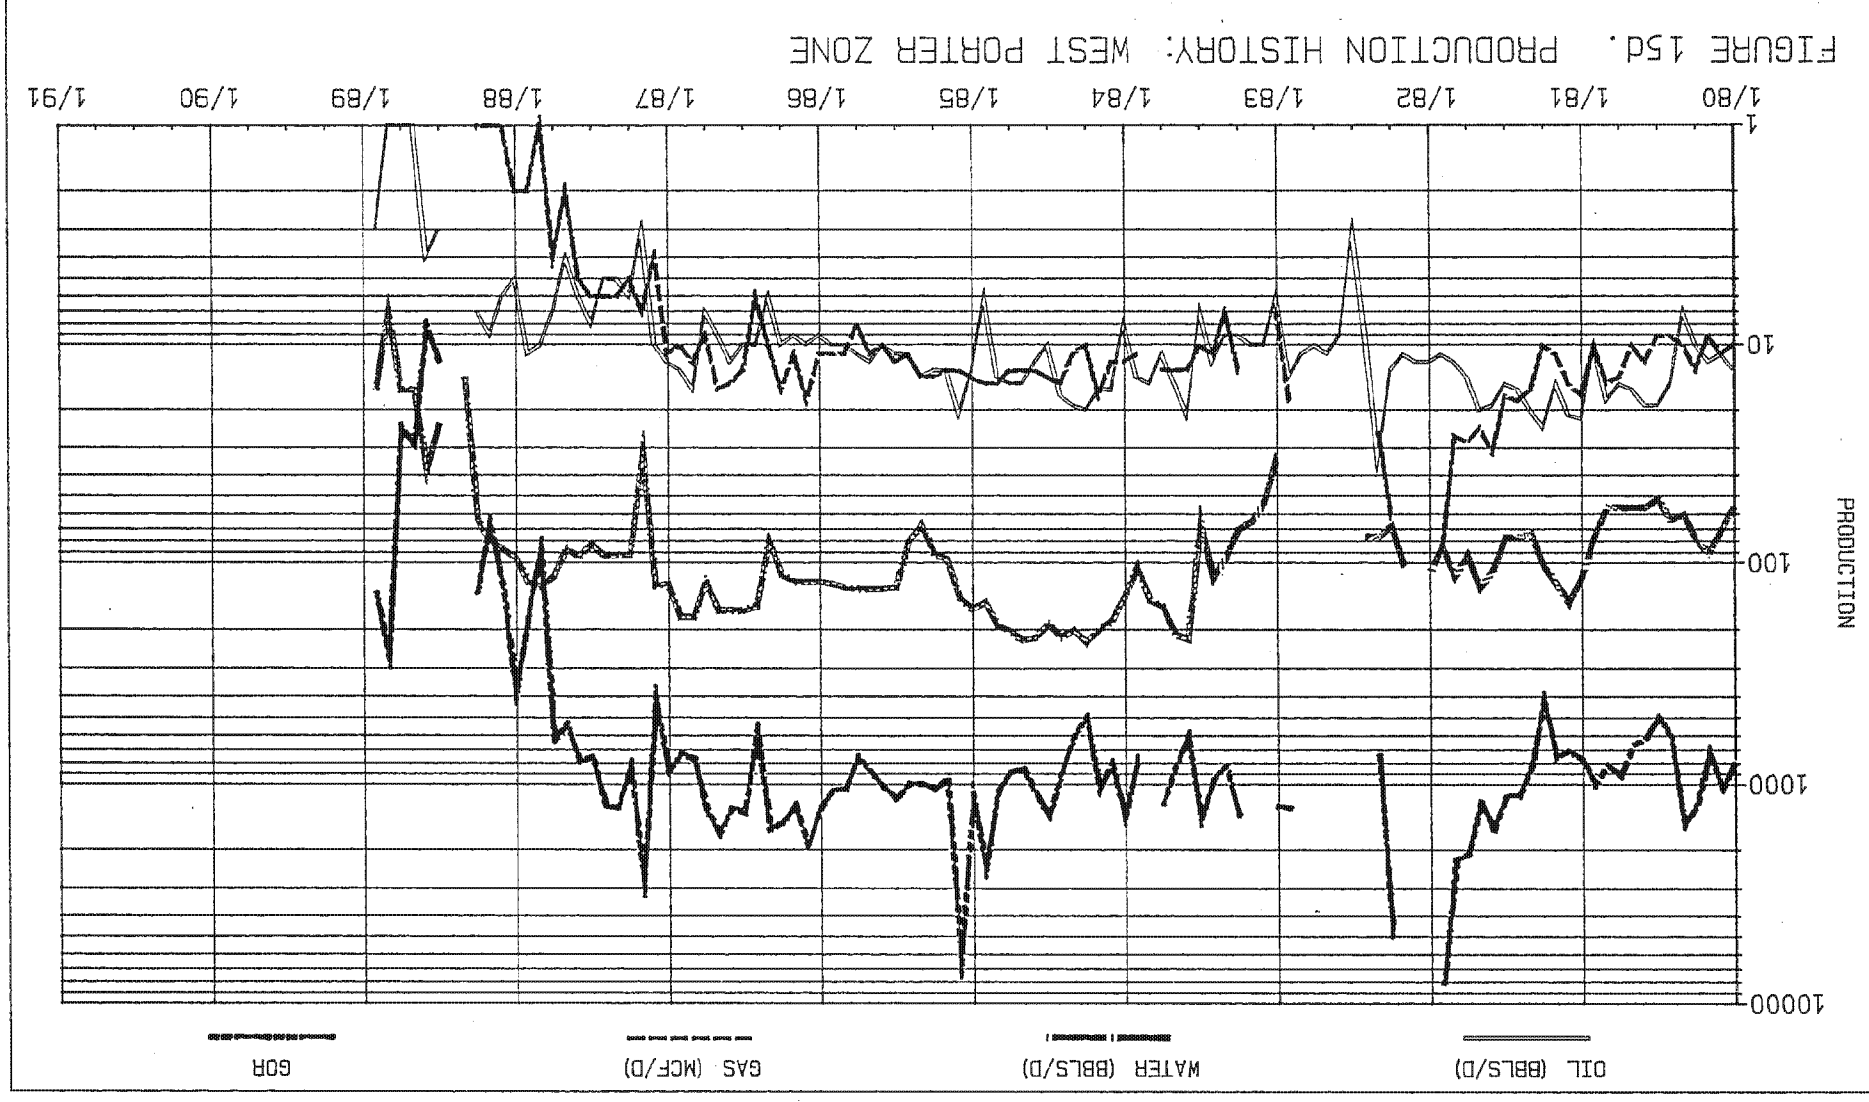


: hr 6/7/89

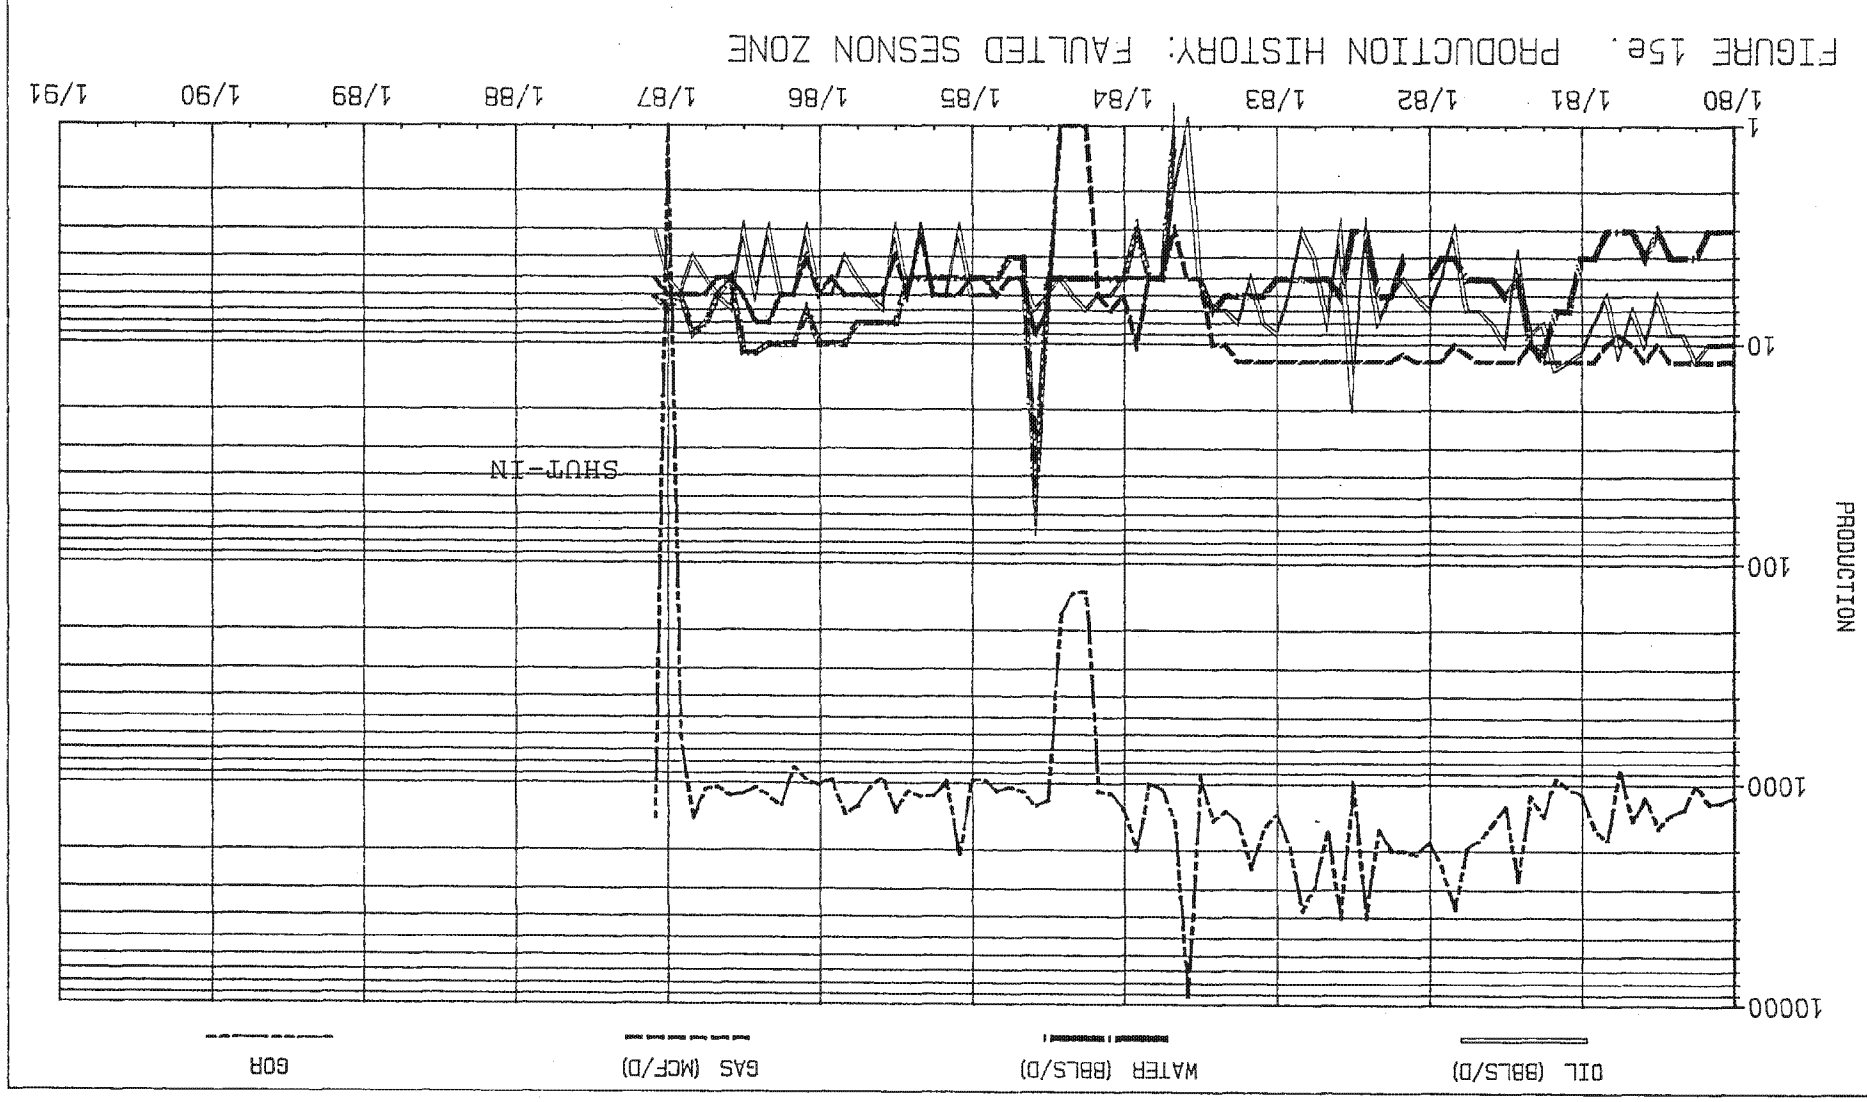

: hr 6/7/89

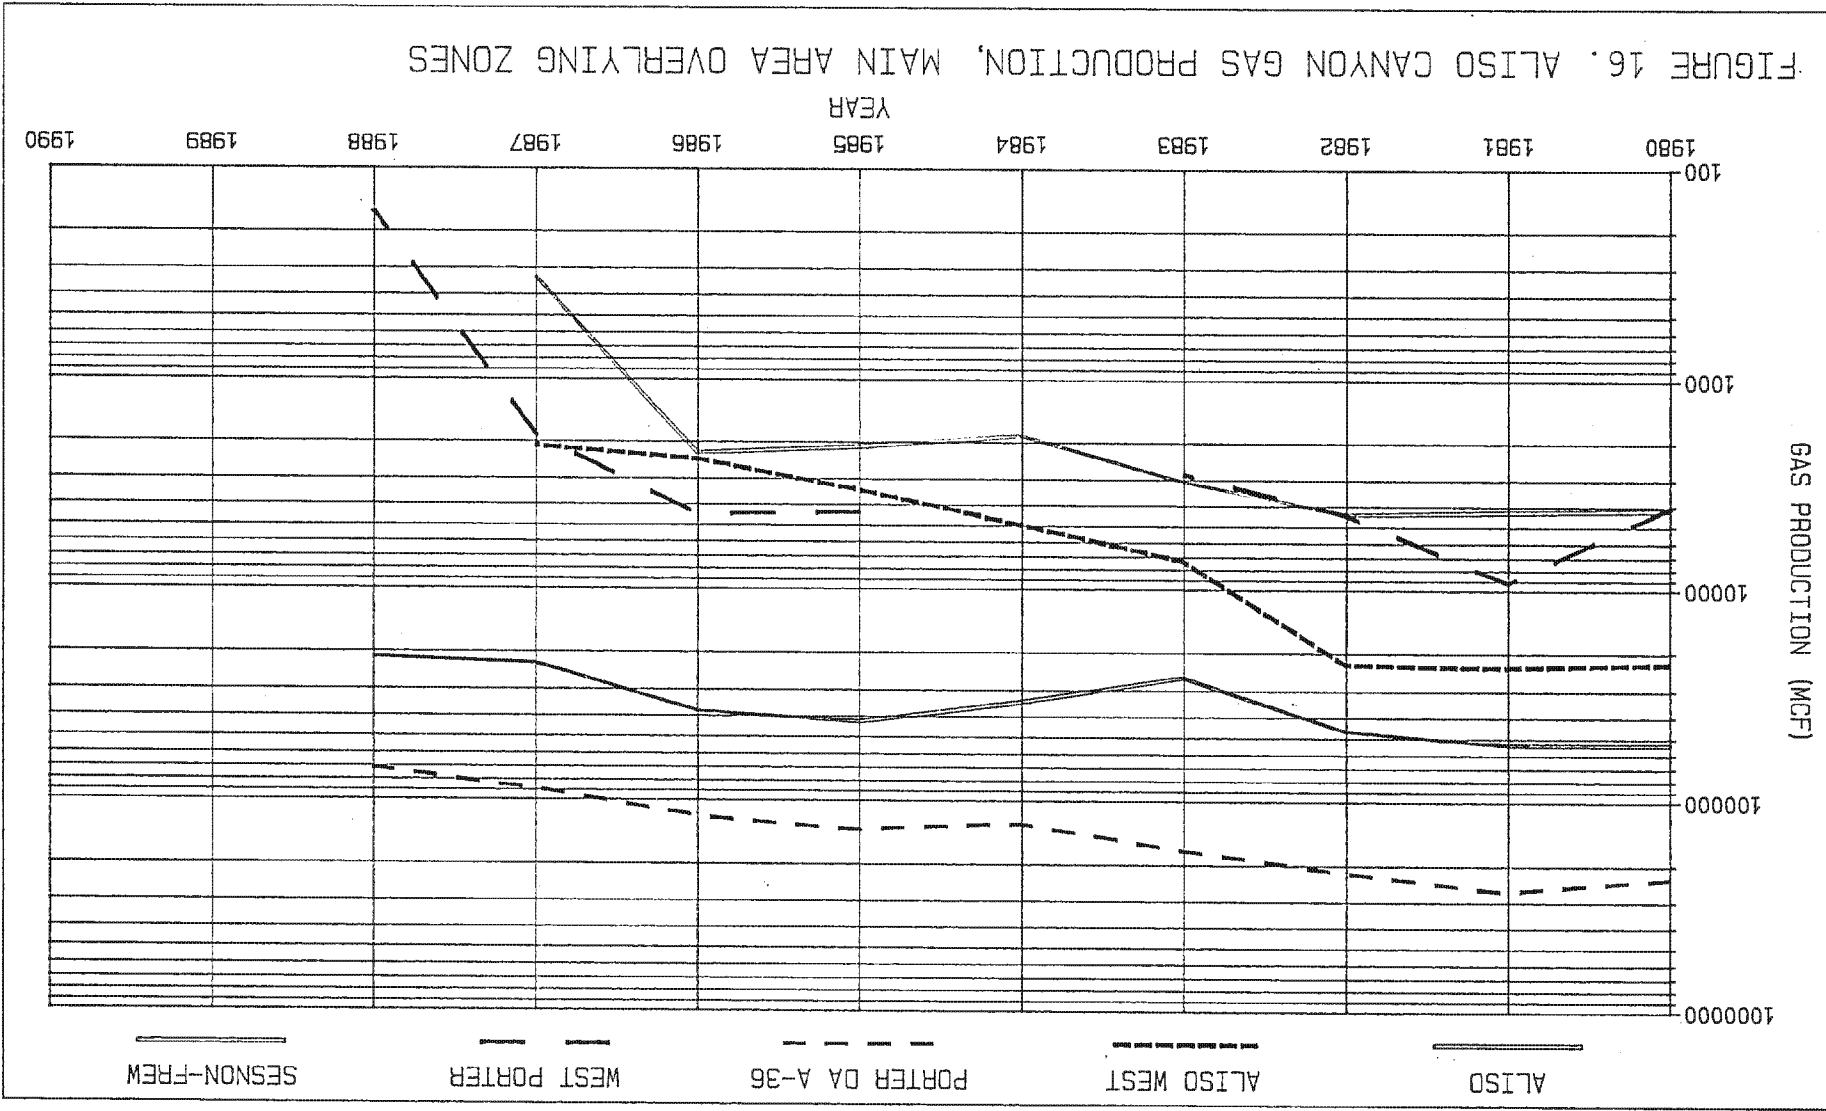

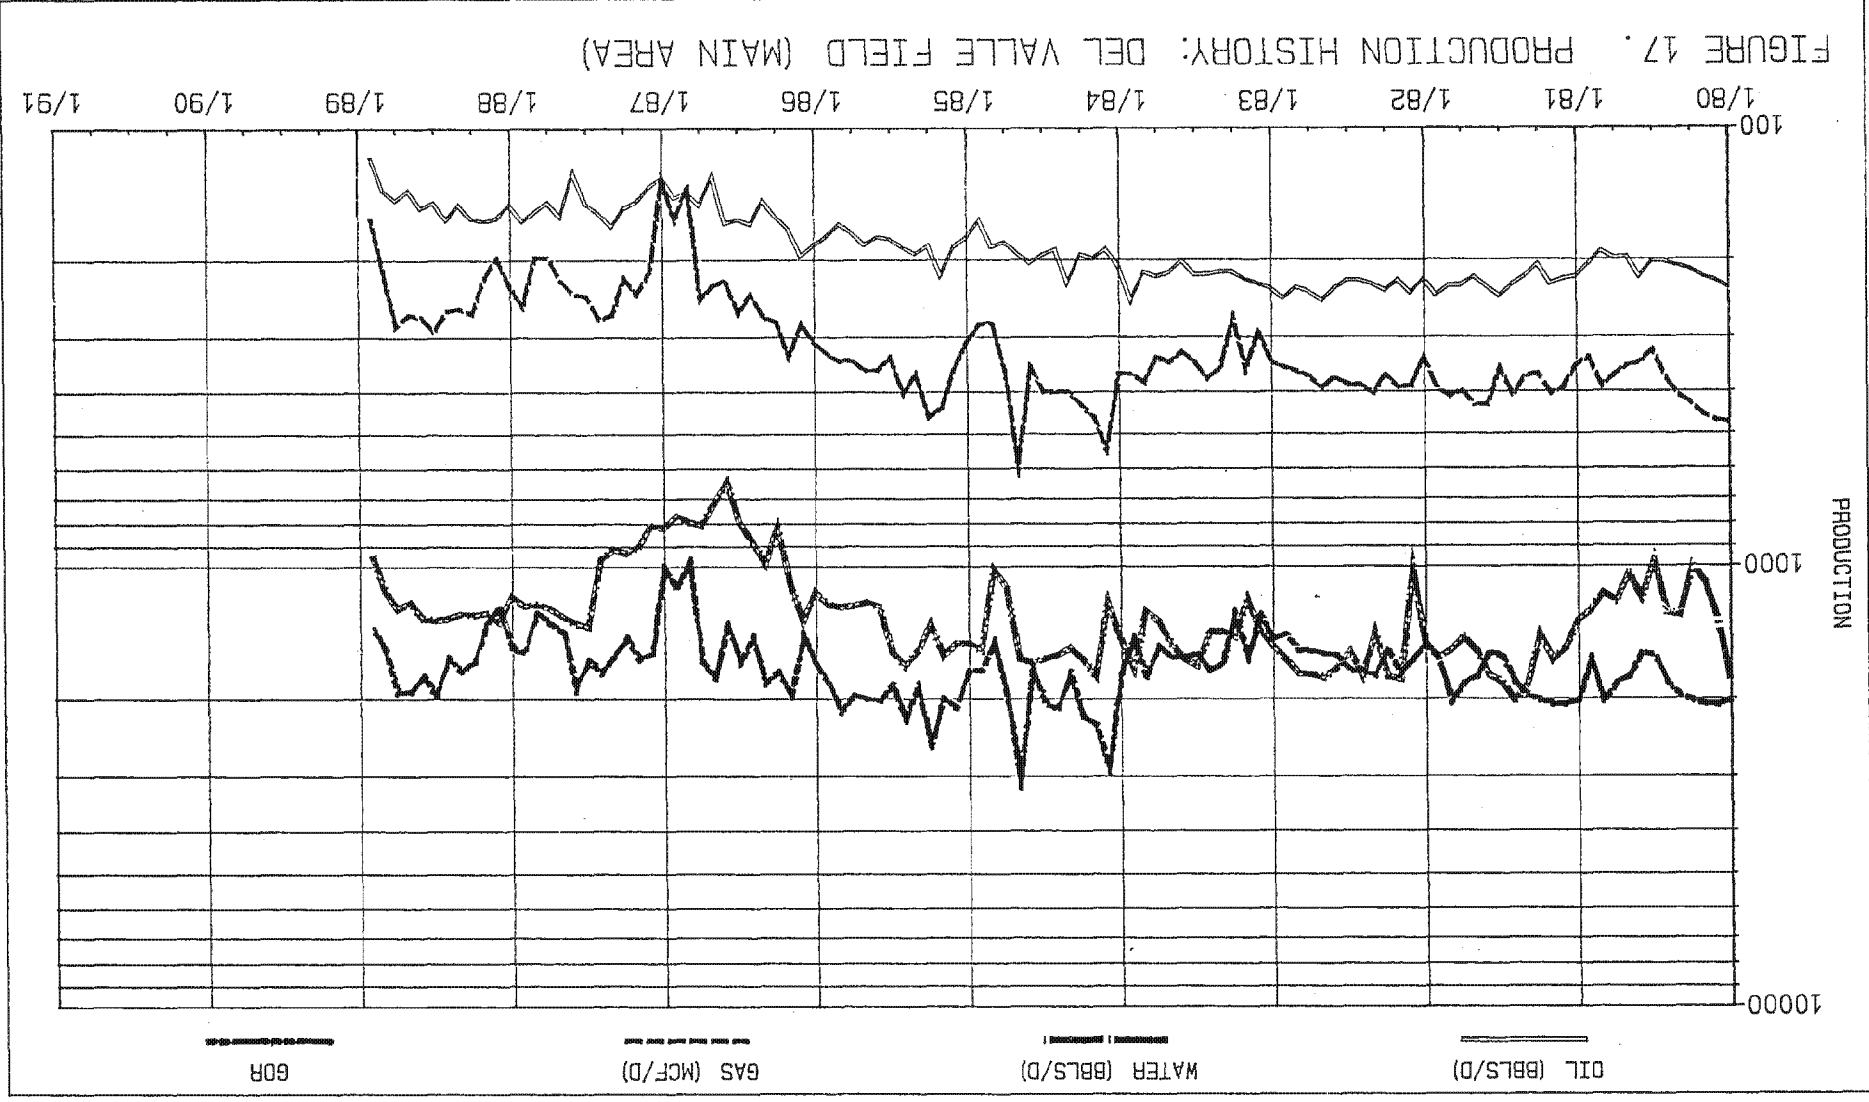


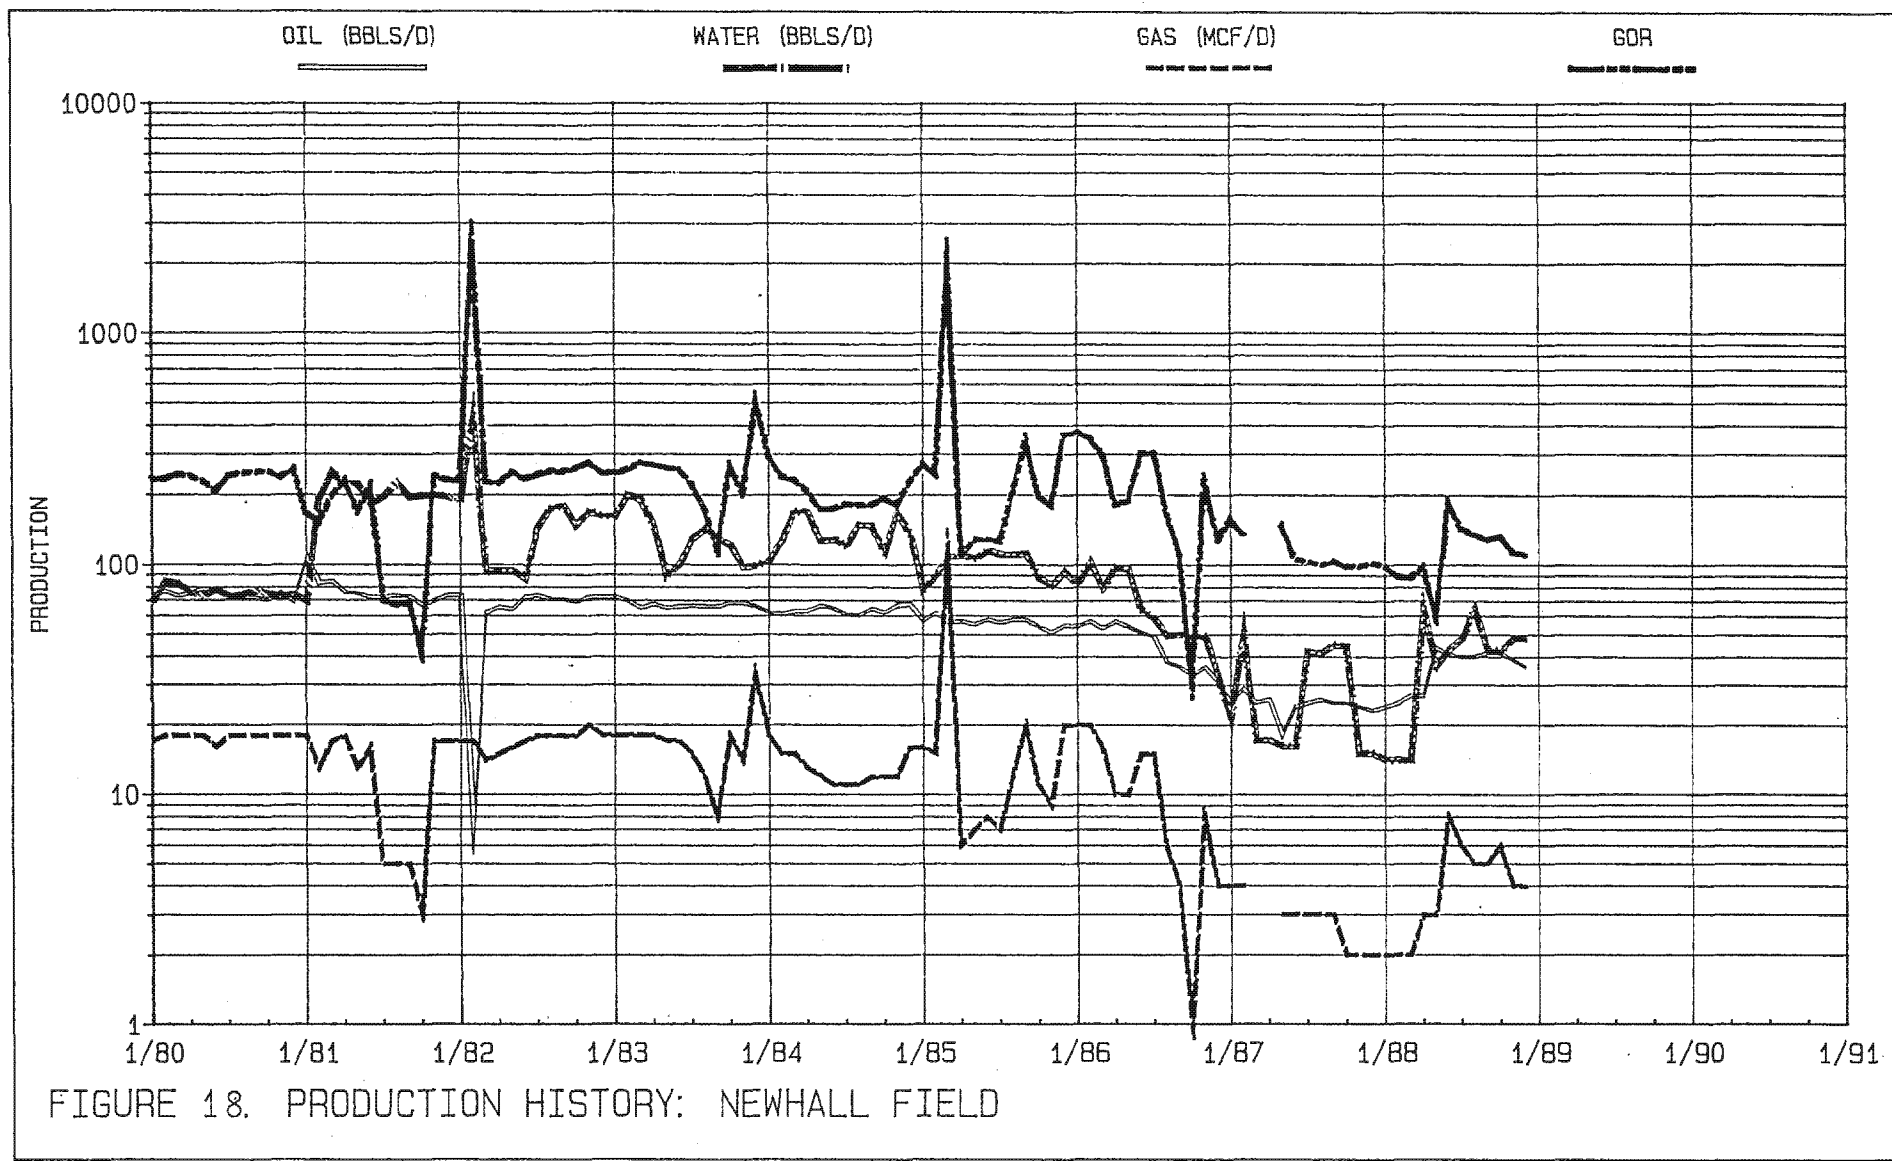


FIGURE 18. PRODUCTION HISTORY: NEWHALL FIELD


:hr 6/8/89

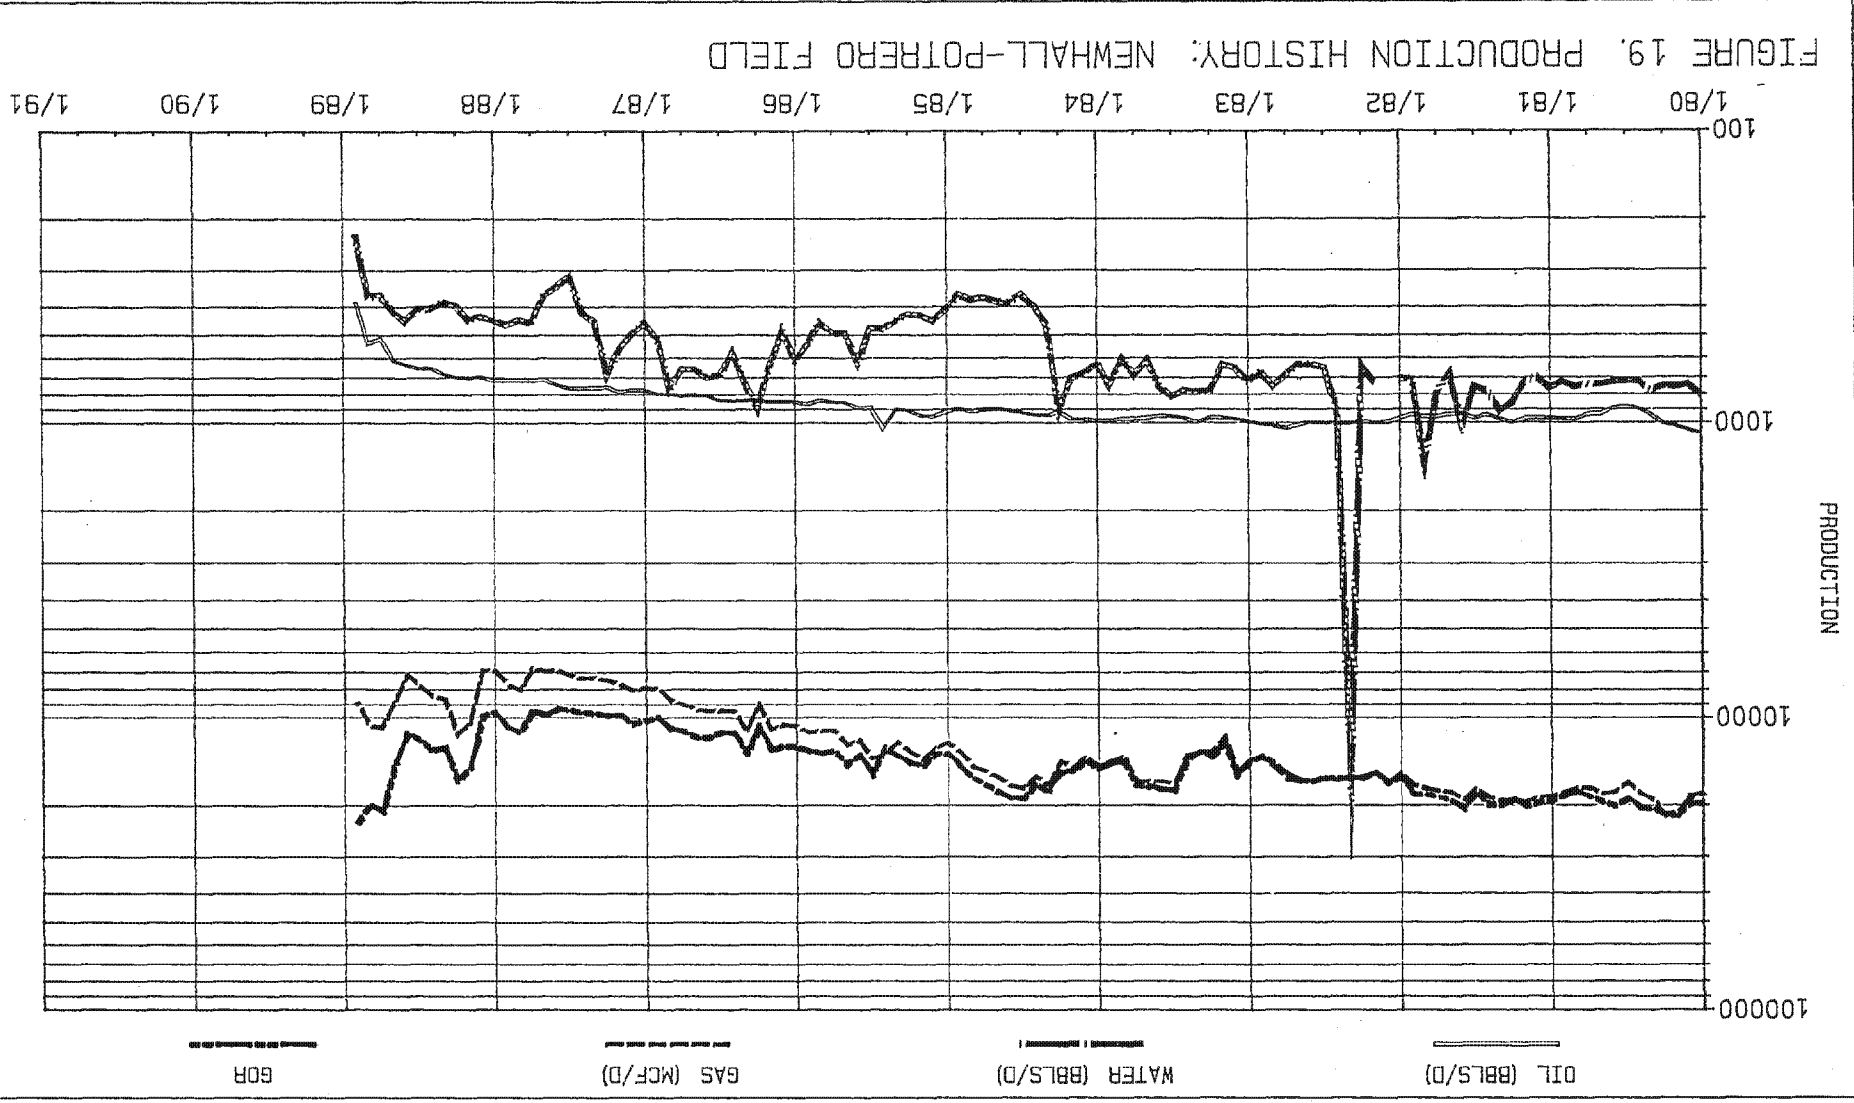


: hr 6/8/89

1/91 1/90 1/89 1/88 1/87 1/86 1/85 1/84 1/83 1/82 1/81 1/80

FIGURE 20. PRODUCTION HISTORY: OAT MOUNTAIN FIELD

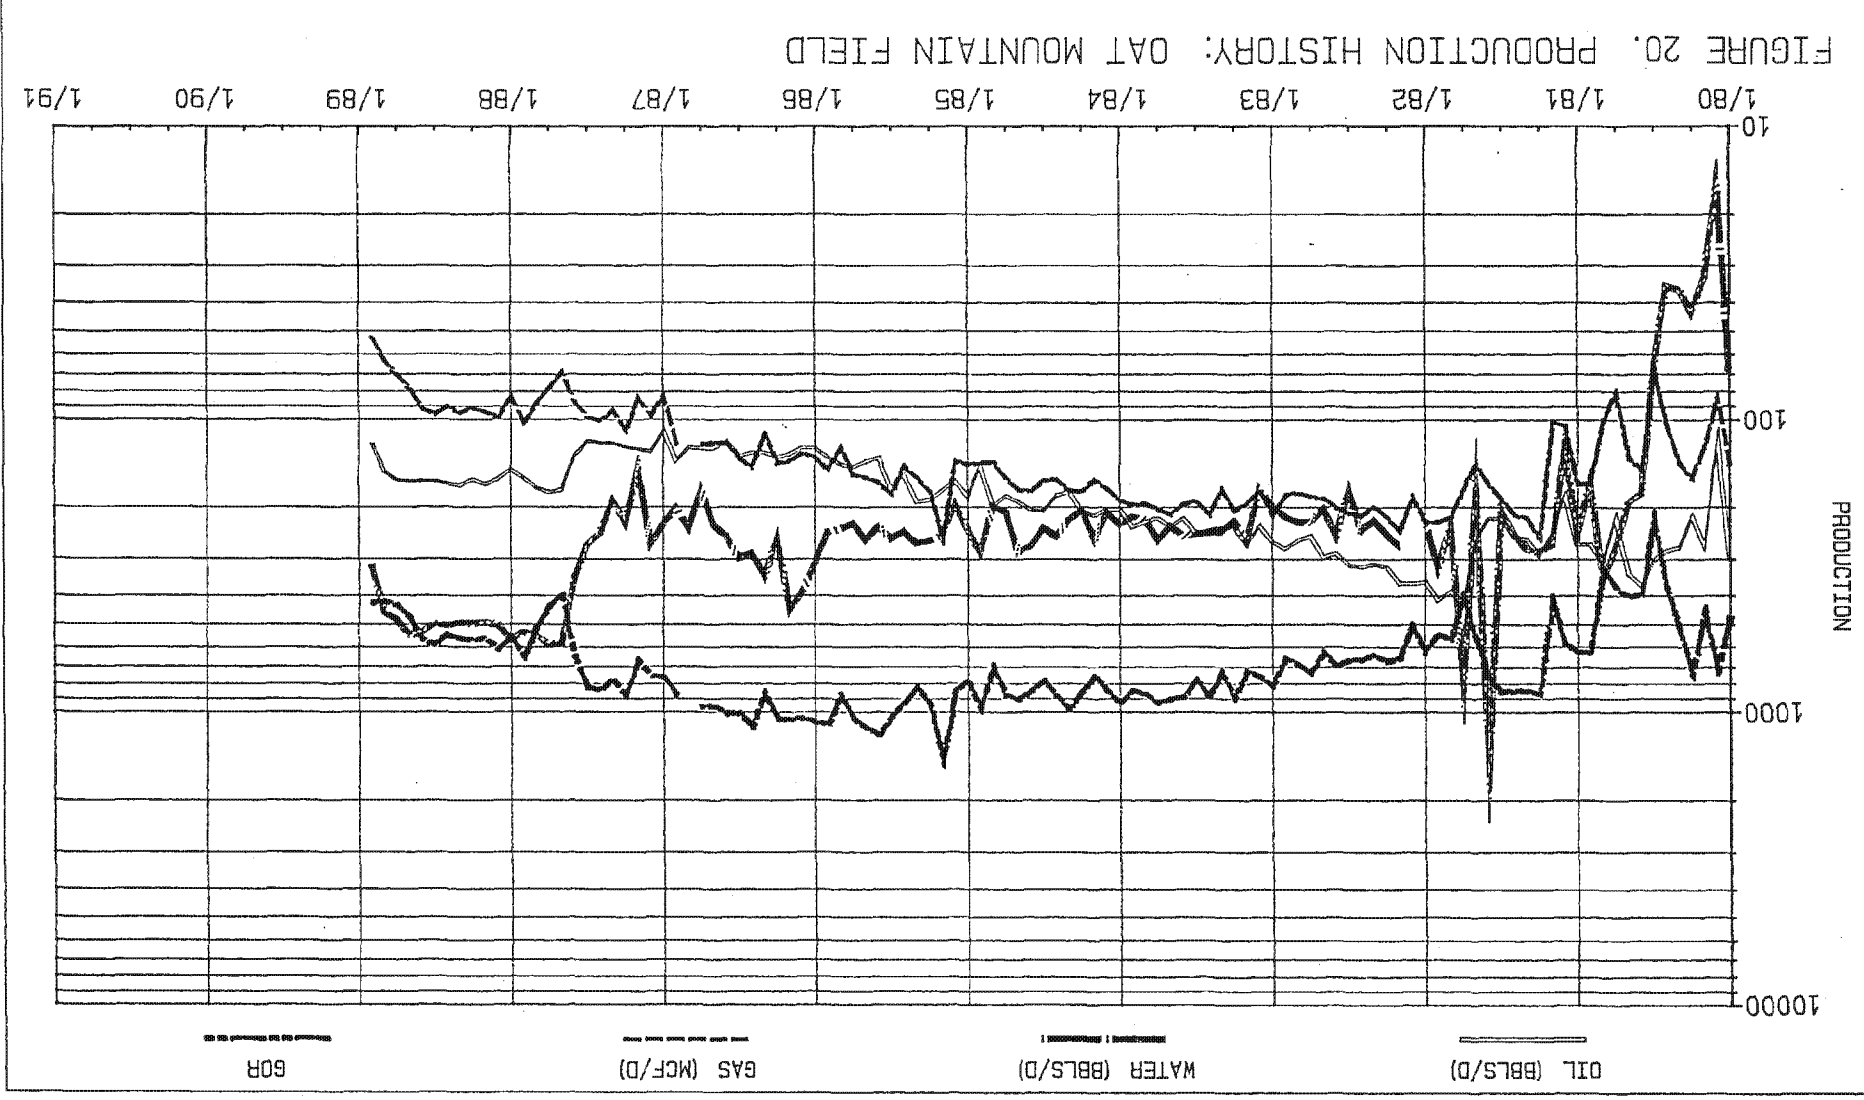

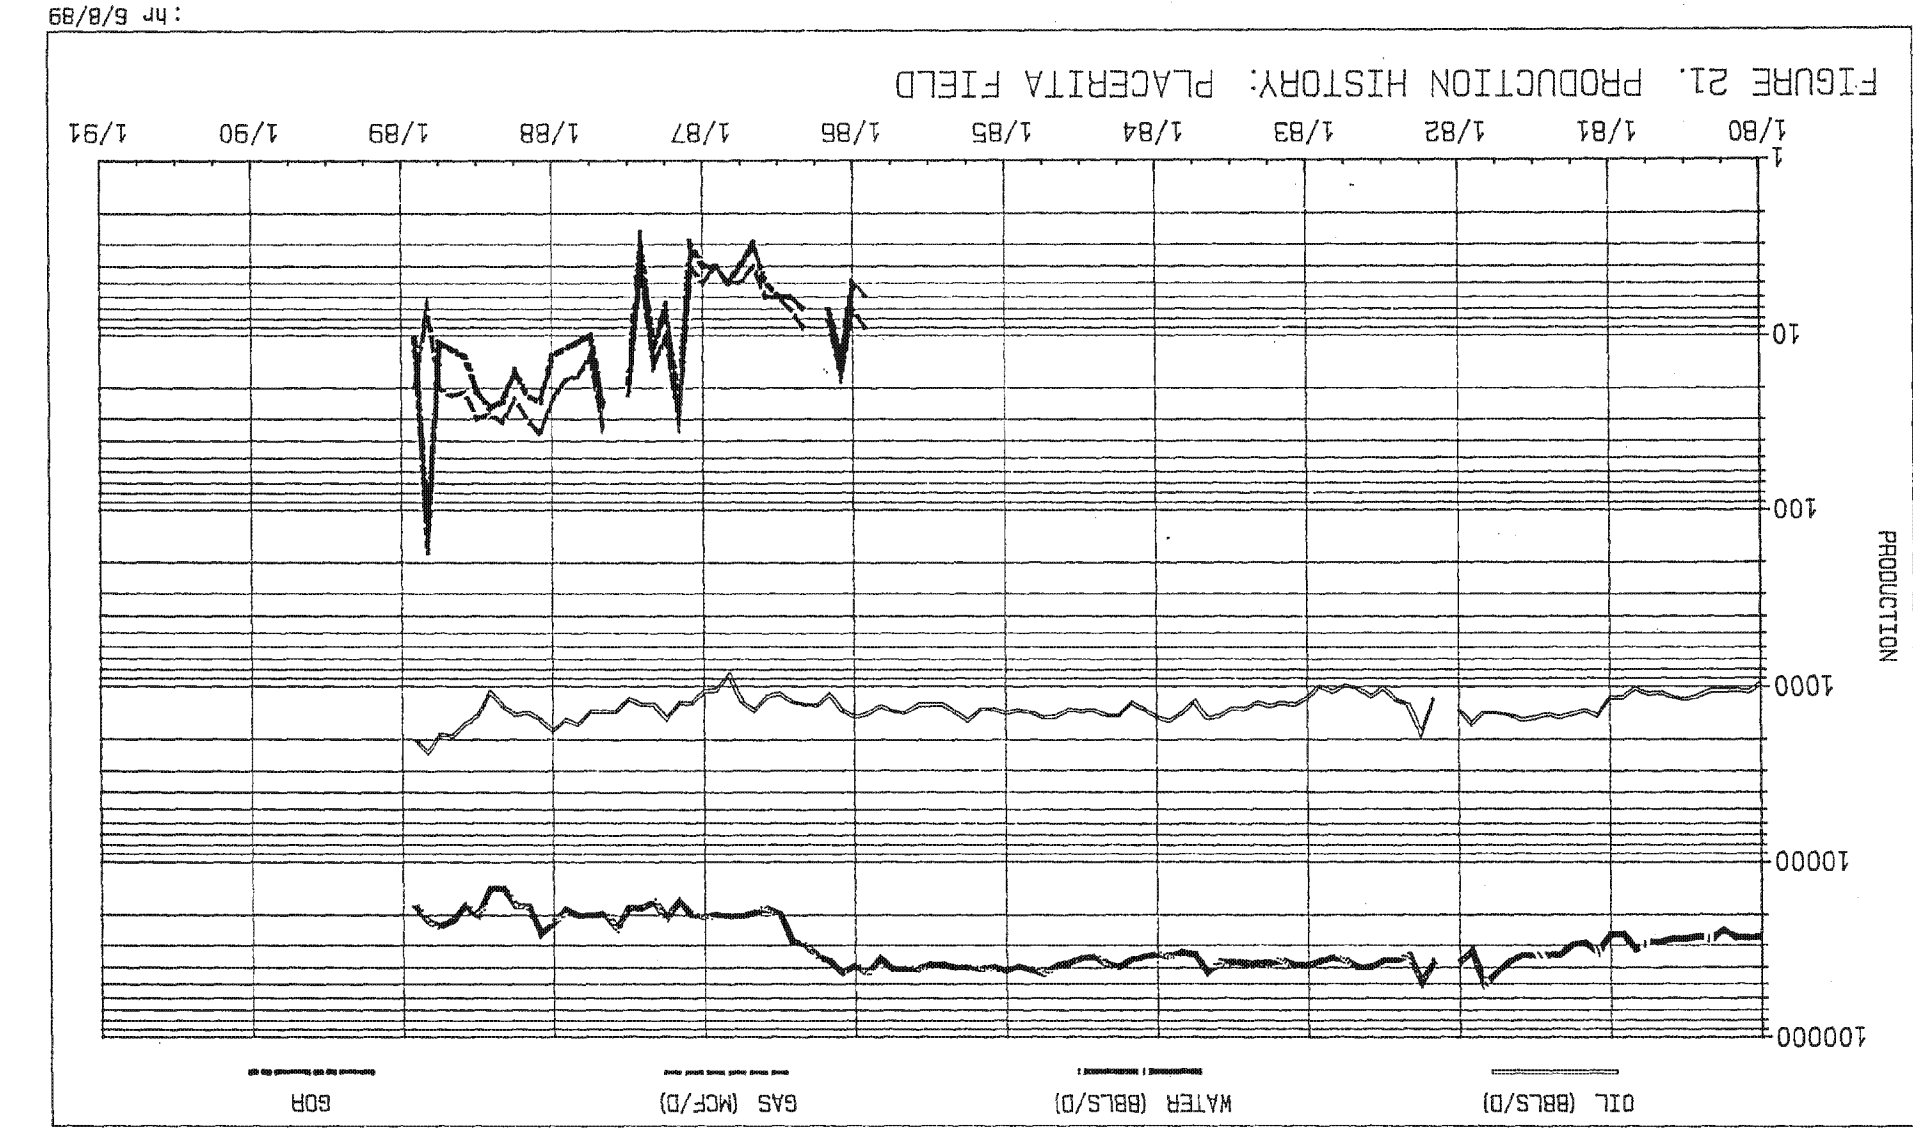

AC_CPU_C SED_DR_27_0003030

Aliso_Canyon_DOGGR_0004986

ENVIRONMENTAL PROTECTION

WELL SAFETY SYSTEMS

All wells at Aliso Canyon are equipped with surface safety systems that are designed to shut the well in to prevent loss of gas and oil in the event of damage to surface piping. The surface safety system consists of fail-close pneumatic operated gate valves that are closed by any of the following:

1. Low pressure pilot - shuts well in if a break in the piping causes pressure to drop below 300 psi.
2. High pressure pilot - shuts well in if pressure in withdrawal line exceeds 710 psi.
3. Sacrificial sand erosion probe - shuts well in if sand erosion wears hole in thin walled probe.
4. Fusible plug - shuts well in if a fire occurs in well cellar.
5. Remote shutdown station - allows well to be shut in manually from no closer than 150 feet away from wellhead.

All surface safety systems are tested twice a year.

Aliso Canyon does not have any critical wells that would require subsurface safety valves. However, three wells that are in high risk landslide areas are equipped with subsurface safety valves that are actuated by the same system as the surface safety valve. These valves are tested twice a year.

All workover and drilling rigs at Aliso Canyon are equipped with Class III or better blowout prevention equipment.

WATER DISPOSAL

Produced water is disposed of by Texaco. Texaco blends produced water from their wells in the Porter, Aliso and Del Aliso Zones with water from Southern California Gas Company wells in the Sesnon-Frew and re-injects it into the Porter and Aliso Zones.

SPILL PREVENTION

The Company has various written procedures that deal with spills of hazardous liquids. These procedures attempt to prevent such spills by requiring periodic inspections of wellheads, piping and tankage. The procedures also contain plans for dealing with spills if they occur. All tanks have secondary containment walls. All natural water courses within the field have catch basins that will trap any oil that would reach them if a field gathering line developed a leak. The oil could then be removed by vacuum truck.

OPERATIONS
May 1988 through May 1989

1. New wells drilled: None

2. Well workovers:

Well

Reason

F 4 Install protective string

P 32 Repair wellhead seals

P 37 Inspect casing; regravel
pack; install protective
string

P 46 Inspect casing

SS 8 Inspect casing

SS 9 Inspect casing

SS 30 Repair tubing

3. Well converted to observation:

None

4. Wells abandoned:

Well

Reason

None

No unusual incidents or problems have occurred since the last
D.O.G. review meeting.

SPR:hr
6/6/89